


220-240
Vac



50-60
Hz



IP20

IK10



850°

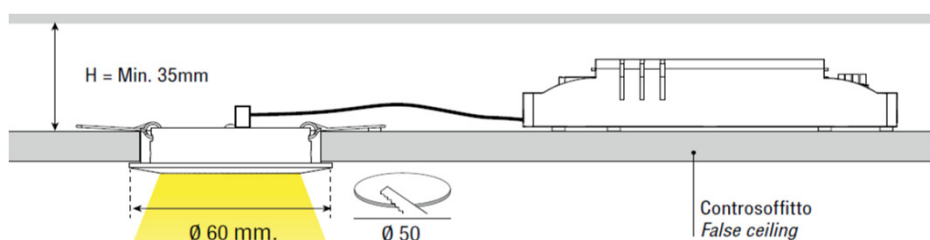

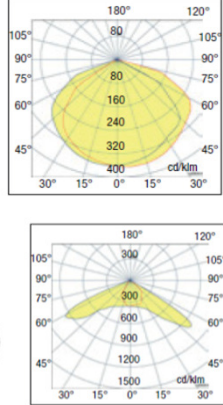Tensione nominale entrata Nominal input voltage	Vac	220-240	Faretto diametro 60mm da incasso in policarbonato bianco completo di inverter per emergenza con autotest e batteria. LED SPOT EMER viene fornito con ottica simmetrica già montata e ottica con lente asimmetrica (corridoio). Funzionamento in SE – Non permanente: il faretto (spento normalmente), in caso di black out si accende per 3 ore.
Corrente nominale Nominal current	A	0,007	
Frequenza Frequency	Hz	50 - 60	
Potenza Power	W	3	
Flusso luminoso Lighting Flux	Lm	200	
Autonomia configurabile Configurable Duration	h	3	Flush mounting spotlight diameter 60mm in white polycarbonate complete with emergency inverter with autotest and battery. SPOT EMER LED is supplied with pre-mounted symmetrical optics and asymmetrical lens optics (corridor). Operation in SE – Not permanent: the spotlight (normally switched off), in the event of a blackout, turns on for 3 hours.
Accumulatori al Nichel Cadmio Nichel Cadmiun battery		3,6V - 1,8Ah	
Inibizione Inhibition	NO		
Esecuzione Type		SE (solo emergenza) Not permanent	
Grado di protezione Internal protection		IP20	
Temperatura ambiente Ta° Ambient Temperature Ta°	°C	-20 ÷ +40	 
Temperatura di colore Kelvin temperature		6000K	
Corpo Body		Policarbonato bianco White polycarbonate	
Sorgente Light source		Modulo led Led module	
Ottica Optic	2	Simmetrica / Corridoio Symmetrical / Corridor	
Schermo Shield		Policarbonato trasparente Transparent polycarbonate	

Conforme alle norme EN60598-1; EN60598-2-1; EN60598-2-2; EN60598-2-22; EN62493; EN62471; EN62031; EN61347-1; EN61347-2-7; EN61347-2-13; EN55015; EN61000-3-2; EN61000-3-3; EN61547

RELCO group persegue una politica di continua ricerca e sviluppo, quindi si riserva di variare in qualsiasi momento e senza preavviso le caratteristiche dei prodotti.

RELCO group pursues a policy of continuous research and development and reserves the right to change at any time and without prior notice, the characteristics of the products.