

# LED Driver a SPINA - PLUG LED Driver


Disponibili da Aprile 2020 - Available from April 2020



## Spina LED passante su filo 60W - 24/48Vdc - LED Plug 60W - 24/48Vdc



Dimensioni (mm) - Dimensions (mm)

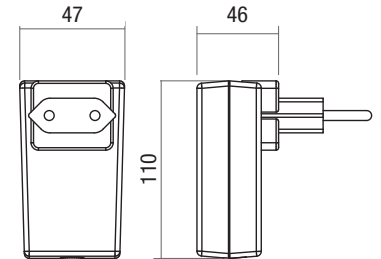

Codice Code	LPH mm	Vdc IN	Vac IN	W	Vout Vdc	Iout mA	Hz	THB?	IC	ta °C	PFC	PCS	CCM cm <sup>3</sup>
ICPS5-240-2500	44x45x110	176-264	100-240	60	24	2500	50/60	30	10A 40µS	35	OK	10	6.800
ICPS5-480-1250	44x45x110	176-264	100-240	60	48	1250	50/60	30	10A 40µS	35	OK	10	6.800

**Caratteristiche tecniche:** alimentatore elettronico con presa intercambiabile per uso indipendente a tensione costante VDT 24-48V. Completo di adattatore per "EU" e "USA". Accessorio a richiesta "UK", Cina e Australia.

Dimmerabile sul cavo con Snello powered o Cross powered.

**Cavo:** lunghezza 2,5m, tipo 2x0,75mm<sup>2</sup>

**Technical features:** electronic interchangeable plug led driver. Constant voltage VDT 24-48V. Provided with adapters for "EU" and "USA", accessories on request UK China and Australia

Dimmable on cable with Slim powered or Cross powered.

**Cable:** length 2.5m, type 2x0.75mm<sup>2</sup>.



Innesto rapido tramite jack  
Rapid connection via jack

Cavo - Cable  
2,5m - 2x0,75mm<sup>2</sup>

### Accessori spina non inclusi - Plug accessories not included



Australian plug  
Cod. 60300914N



UK plug  
Cod. 60300910N



China plug  
Cod. 60300912N