

Lampade professionali a LED - Professional LED lamp

CRI >90



Dimmerabile con alimentatore a corrente costante vedi Dimmable with constant current power supply see

VEGA 9 LED HL111 - G53



CDT

Codice Code	mA W	Beam	K	N° LED	DIM	Vdc	ta °C	lm*	h.	PCS	CCM cm³	Euro Cad.
R111/M/B	350mA 9W 500mA 12,5W 700mA 18W	30°	6000	9	OK	27	40	1200 1550 2010	50.000	1	1.120	35,00
BIR111/M/B		30°	6000	9	OK	27	40	1200 1550 2010	50.000	1	1.120	35,00
NER111/M/B		30°	6000	9	OK	27	40	1200 1550 2010	50.000	1	1.120	35,00
R111/M/BN		30°	4000	9	OK	27	40	1200 1550 2010	50.000	1	1.120	35,00
R111/M/BC		30°	3000	9	OK	27	40	1130 1460 1900	50.000	1	1.120	35,00
R111/W/BN	350mA 9W 500mA 12,5W 700mA 18W	40°	4000	9	OK	27	40	1200 1550 2010	50.000	1	1.120	35,00
R111/W/BC	9W	40°	3000	9	OK	27	40	1130 1460 1900	50.000	1	1.120	35,00

LED MEISSA HL111 - G53



CDT

Codice Code	mA W	Beam	K	N° LED	DIM	Vdc	ta °C	lm*	h.	PCS	CCM cm³	Euro Cad.
R111MC/M/BC	350mA 12W 550mA 19W	25°	3000	1	OK	37	40	1650 2560	50.000	1	1.120	40,00
R111MC/W/BN	350mA 12W 550mA 19W	40°	4000	1	OK	37	40	1730 2700	50.000	1	1.120	40,00
R111MC/W/BC	350mA 12W 550mA 19W	40°	3000	1	OK	37	40	1650 2560	50.000	1	1.120	40,00
R111MC/60/BC	350mA 12W 550mA 19W	60°	3000	1	OK	37	40	1650 2560	50.000	1	1.120	40,00

LED CHAMELEON NEW HL111 - G53




CDT



Codice Code	mA W MAX	Beam	K	N° LED	DIM	Vdc	Nominal Lm (Tc=25°C)	Lm Output	Lm/W	PCS	CCM cm³	Euro Cad.
R111/50/25/BC	1400 50	25°	3000	1	OK	37	7.650	6.010	120	1	6.800	80,00
R111/50/40/BC	1400 50	40°	3000	1	OK	37	7.650	6.010	120	1	6.800	80,00
R111/50/60/BC	1400 50	60°	3000	1	OK	37	7.650	6.010	120	1	6.800	80,00
R111/50/25/BN	1400 50	25°	4000	1	OK	37	7.650	6.010	120	1	6.800	80,00
R111/50/40/BN	1400 50	40°	4000	1	OK	37	7.650	6.010	120	1	6.800	80,00
R111/50/60/BN	1400 50	60°	4000	1	OK	37	7.650	6.010	120	1	6.800	80,00

A richiesta 6000K - On demand 6000K


LED Vega - LED Meissa - Dimens. (mm)




LED Chameleon - Dimens. (mm)



25°



40°




60°

Codice Code	mA MAX	W MAX	Beam	K	LED	DIM	Vdc	Nominal Lm (Tc=25°C)	Lm Output	Lm/W	PCS	CCM cm³	Euro Cad.
558117	700	15	120°	3000	LED SMD	OK	24	Max 3.200	Max 2.700	127	1	0,720	25,00
558118	700	15	120°	4000	LED SMD	OK	24	Max 3.200	Max 2.700	127	1	0,720	25,00

LED R7s / RX7s



Dimensioni (mm) - Dimensions (mm)

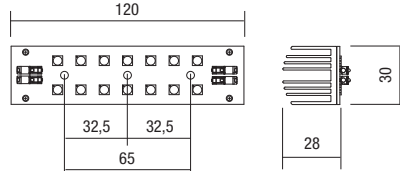

mA	500	600	700
W	11	13	15
Lm	1.812	2.314	2.700