

LED Ferma

A richiesta
On demand

0-10V



WIRELESS



LED Ferma, incassi a LED con ottica arretrata fissa ideale per gli ambienti commerciali, residenziali e in qualsiasi ambiente dove è necessaria un'illuminazione spot e d'accento senza abbagliamento.

Apparecchi semplici ma efficaci a base tonda o quadra con cornice, ideali per sostituire apparecchi con sorgenti dicroiche da 50W.

Installazione: incasso a soffitto

Corpo: alluminio pressofuso. Verniciatura di tipo poliestere eseguita a polvere.

Conforme alla norma: EN60598-1, RG0 nessun rischio fotobiologico ai fini della norma EN62471.

LED: mantenimento del flusso luminoso minimo al 80%: 50.000h (L80B10).

Driver: incluso nel Kit.

LED Ferma, LED Firma, LED series downlighter with fixed optic in rear position, ideal for residential and retail environments, and for any other space that requires accent spot lighting without glare. It is a simple, yet effective fixture with round or square body and frame, ideal to replace luminaires with 50W dichroic lamps.

Installation: ceiling recessed.

Body: die-cast aluminium. Polyester powder coating.



According to standard: EN60598-1, RG0 exempt from photo-biological risks in compliance with standard EN62471.

LED: maintenance of minimum luminous flux to 80%: 50.000h (L80B10).

Driver: included in Kit.

220-240V 50/60Hz

LED Ferma

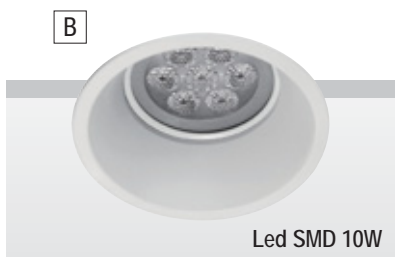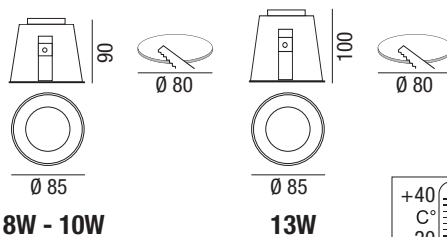

colour	W max		Lm Output		mA max	K	pcs	Kg	CELL
G	8	3 Led SMD	800	40°	700	3000	001	0,314	30779NAP
DALI 2	8	3 Led SMD	800	40°	700	3000	001	0,314	30779DALNAPO
G	13	Led COB	1400	25°	350	3000	001	0,314	30777/V10
G	13	Led COB	1400	40°	350	3000	001	0,314	30779/V10
B	10	7 Led SMD	1050	25°	500	3000	001	0,314	30777/W
B	10	7 Led SMD	1050	40°	500	3000	001	0,314	30779/W
DALI 2	10	7 Led SMD	1050	40°	500	3000	001	0,314	30779/W/DALI
B	10	7 Led SMD	1050	25°	500	4000	001	0,314	30777/W/4K
B	8	3 Led SMD	800	40°	700	3000	001	0,314	30779/WNAP
B	8	3 Led SMD	800	40°	700	4000	001	0,314	30779/WNAP4K
B	13	Led COB	1400	25°	350	3000	001	0,314	30777/W/V10
B	13	Led COB	1400	40°	350	3000	001	0,314	30779/W/V10

A richiesta per quantità disponibile nella versione 4000K - On demand for quantity available in the 4000K versions

Dati fotometrici - Photometric data

