



LED Ischia è un apparecchio da esterno, ad alto grado di protezione, utilizzabile sia tramite staffa di fissaggio da terra o parete (inclusa), con picchetto (da ordinare separatamente) o da palo (da ordinare separatamente), ideale per illuminare facciate giardini, parchi, aiuole, terrazzi.

Corpo e telaio: in alluminio pressofuso UNI EN 1706 verniciato con polvere termoindurente poliestere

Verniciatura: di tipo poliestere eseguita a polvere, resistente agli agenti atmosferici e alla corrosione e garantita per 1.000 ore in nebbia salina. Colore Nero RAL 9005.

Ottica: con lenti in PC ad alto confort visivo e buon effetto antiriflesso.

Schermo: vetro temprato di spessore 4mm super bianco resistente agli shock termici e agli urti.

Driver: incorporato

Sorgente: LED **CREE** Fattore di potenza $\geq 0,92$. Mantenimento del flusso luminoso al 80%. 50.000h (L80B20)

A richiesta: DALI 2 e DMX.

The Capri LED is an outdoor appliance with a high degree of protection, which can also be used with a floor or wall fixing bracket (included) or with a stake (to be ordered separately), ideal for illuminating façades in gardens, parks, flowerbeds, terraces.

Housing and frame: made by UNI EN 1706 die-cast aluminum, coated with polyester thermoset powder

Coating: coated with powdered polyester, resistant to atmospheric agents, corrosion and guaranteed for 1.000 hours in saline mist. Black RAL9005 color.



Optic: with PC lenses with high visual comfort and good anti glare effect

Shield: tempered glass with 4mm thickness super white resistant to thermal shocks and collisions

Driver: included


*Light source: LED **CREE** Power factor $\geq 0,92$. maintenance of 80% minimum luminous flux: 50,000h (L80B20).*

On demand: DALI 2 and DMX.

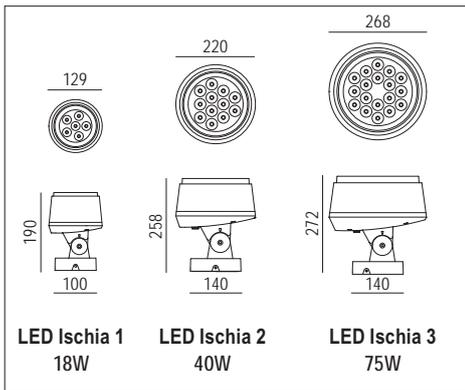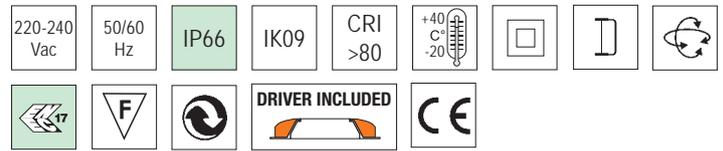


**Norme di riferimento
Standard reference**
EN60598-1
EN60598-2-1
EN62471
EN62031
EN60598-2-5
EN61547


colour	W	LED	Optic	K	lm/W Output	pcs	Kg	CELL
N	18	N° 8 Led 5050	15°	3000	130	1	4,00	215-18-15-3K
N	18	N° 8 Led 5050	40°	3000	130	1	4,00	215-18-40-3K
N	40	N° 12 Led 5050	15°	3000	130	1	5,50	215-40-15-3K
N	40	N° 12 Led 5050	40°	3000	130	1	5,50	215-40-40-3K
N	75	N° 18 Led 5050	15°	3000	130	1	8,00	215-75-15-3K
N	75	N° 18 Led 5050	40°	3000	130	1	8,00	215-75-40-3K

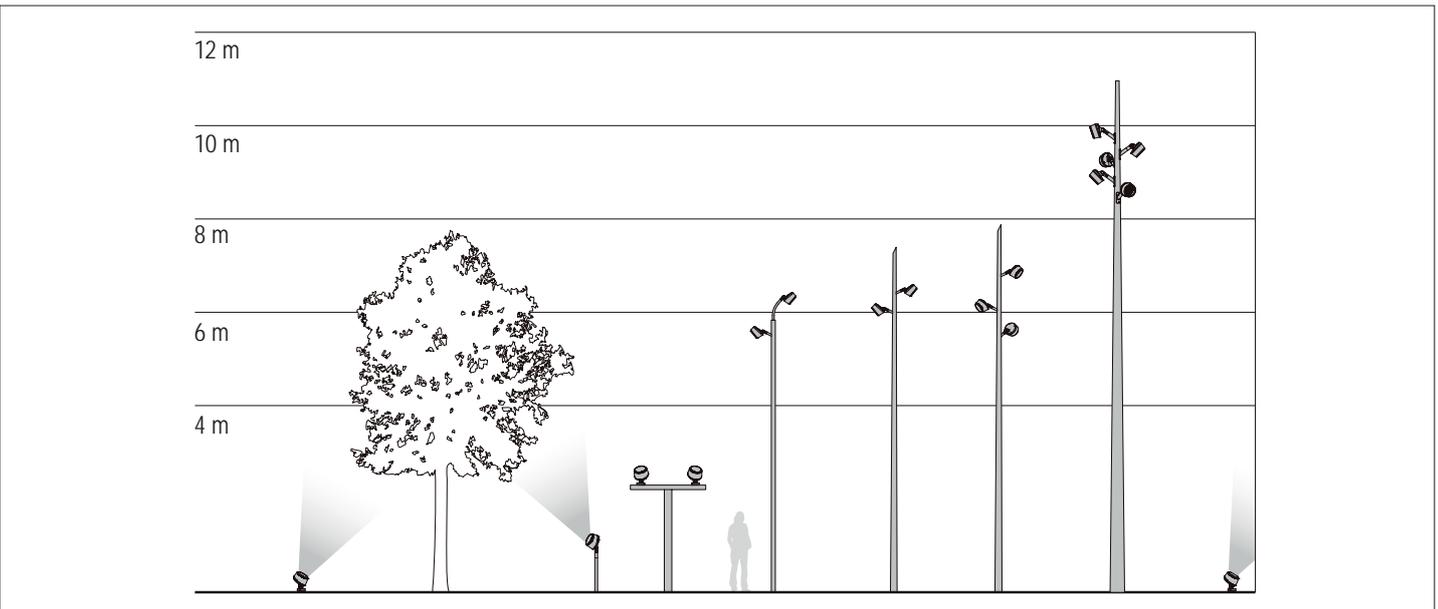


Accessori ottiche - Optical accessories



15°
Semi-concentrate - Spot




40°
Intermedio - Medium

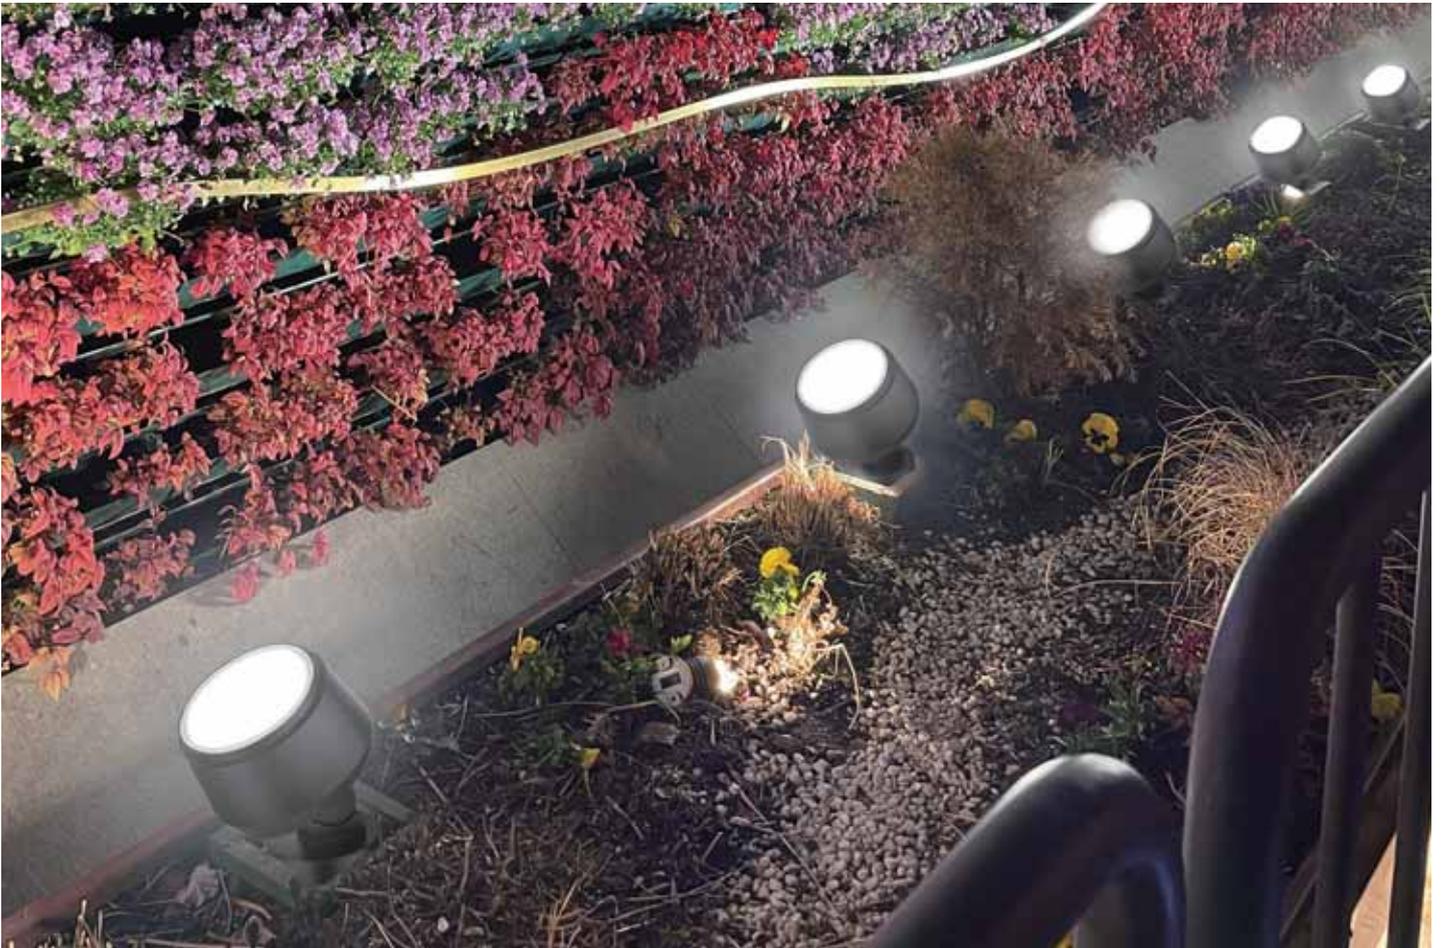

Outdoor

Accessori non inclusi - Not included accessories

Palo per LED Ischia - LED Ischia pole
Cod. 215PA

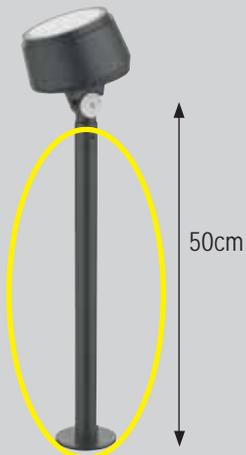

Staffa per applicazione su palo
Bracket for pole application
Cod. 215ST

