

LED Londra - LED Miami

Installazione: dotato di molle in acciaio per un rapido e facile inserimento (es. controsoffitti, pannelli in legno, piastrelle) oppure con cassaforma (accessorio), da murare.

Corpo e ghiera: alluminio cromato, verniciato Grigio (RAL7001) o Bianco (RAL9010). Resistente alla corrosione e agli agenti atmosferici.

Diffusore: lente in vetro piano convessa a 60°; riflettore in alluminio anodizzato

Guarnizione: in gomma silicónica.

Sorgente: LED **SAMSUNG**. Mantenimento del flusso luminoso al 80%. 50.000h (L80B20)

Alimentazione: non inclusa; dotato di 50cm di cavo FROR PVC 2x0,5mm².

Installation: with steel springs for quick and easy insertion (e.g. in false ceilings, wooden panels and tiles) or with casing (accessory) for installation in walls.


Housing and setting ring: chromed aluminium, painted grey (RAL7001) or white (RAL9010). It is rustproof and resistant to atmospheric agents.

Shade: flat-convex glass lens at 60°; reflector in anodized aluminium.

Gasket: in silicone rubber.

Source: LED **SAMSUNG**. Maintenance of 80% minimum luminous flux: 50,000h (L80B20).

Power supply: not included with a 50cm of FROR PVC PVC 2x0.5mm² wire.


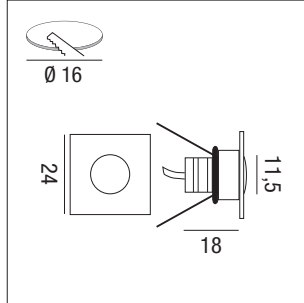


IP67 IK07 CRI >80 +40°C / -20°C

CE

DRIVER NOT INCLUDED

LED Londra								
colour	W	mA	Optic	K	lm	pcs	Kg	S + L
B	1	350	60°	3000	120	1	0,02	27343
C	1	350	60°	3000	120	1	0,02	27151

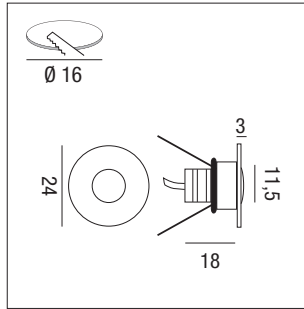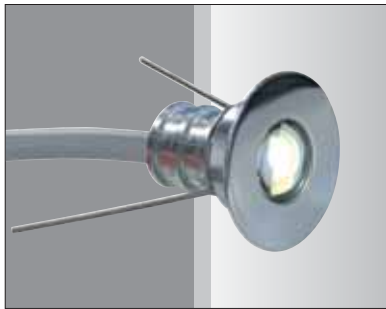

IP67 IK07 CRI >80 +40°C / -20°C


CE

DRIVER NOT INCLUDED


LED Miami								
colour	W	mA	Optic	K	lm	pcs	Kg	S + L
B	1	350	60°	3000	120	1	0,02	27345
G	1	350	60°	3000	120	1	0,02	27152
C	1	350	60°	3000	120	1	0,02	27152/CR

A richiesta: disponibile nella versione 4000K e 6000K per ordine di almeno 100 pezzi
On demand: available in the 4000K and 6000K version on orders of at least 100 pieces of product

Accessori NON inclusi - NOT included accessories

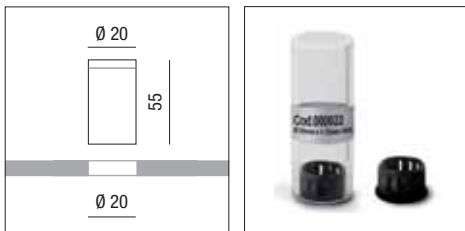

Cod. 000022
Cassaforma
Framework

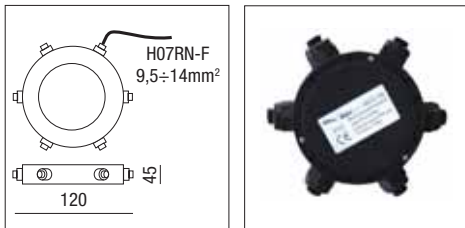

Cod. 12370
Big box - IP68
1 Entrata / 5 Uscite - 1 Input / 5 Outputs



