

# LED Luxxi

A richiesta **0-10V**



Serie di proiettori a sospensione con elevata resa cromatica per utilizzo in centri commerciali, supermercati per mettere in risalto i banchi di alimentari, uffici o spazi in coworking, concessionari e grandi aree in genere.

**Corpo:** vano porta componenti in alluminio pressofuso, verniciato a polveri poliestere resistente alla corrosione ed agli agenti atmosferici. Dissipatore in lega di alluminio estruso. Piastra porta cablaggio in acciaio.

**Diffusore:** in policarbonato trasparente internamente prismaticizzato e all'esterno liscio antipolvere per una rapida pulizia, infrangibile e autoestinguento V2.

**Conforme alla norma:** EN60598-1, RGO nessun rischio fotobiologico ai fini della norma EN62471.

**Led:** mantenimento del flusso luminoso minimo al 80%: 50.000h (L80B10).

**Driver:** Incluso > 50.000 h Fattore di potenza ≥0,95.

*Series of ceiling suspension spotlights. Die-cast aluminium parts compartment, polyester powder coated, resistant to corrosion and the elements. Extruded aluminium alloy sink. Steel cable plate. Prismatised polycarbonate diffuser on the inside and smooth on the outside, for quick cleaning .*

*According to standard: EN60598-1, RGO exempt from photo-biological risks in compliance with standard EN62471.*

*Led: maintenance of minimum luminous flux to 80%: 50.000h (L80B10). Driver: included.*



Vedi anche LED Minizeus pag.19  
See also LED Minizeus page 19

220-240V 50/60Hz




IK08

IP43

CRI >90




## LED Luxxi 320/A

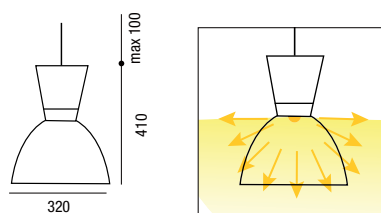


colour	W			Lm output	K	pcs	Kg	CELL	Euro cad.
<b>A</b> <b>N</b>	30	40°	1 LED COB	3500	3000	001	4.90	28155	200,00
<b>A</b> <b>N</b>	30	40°	1 LED COB	3500	4000	001	4.90	28155/4K	200,00

## LED Luxxi 500

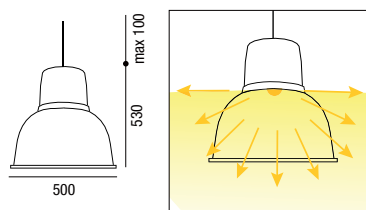

colour	W			Lm output	K	pcs	Kg	CELL	Euro cad.
<b>N</b>	80	40°	2 LED COB	9000	3000	001	6.50	28161	350,00
<b>N</b>	80	40°	2 LED COB	9000	4000	001	6.50	28161/4K	350,00



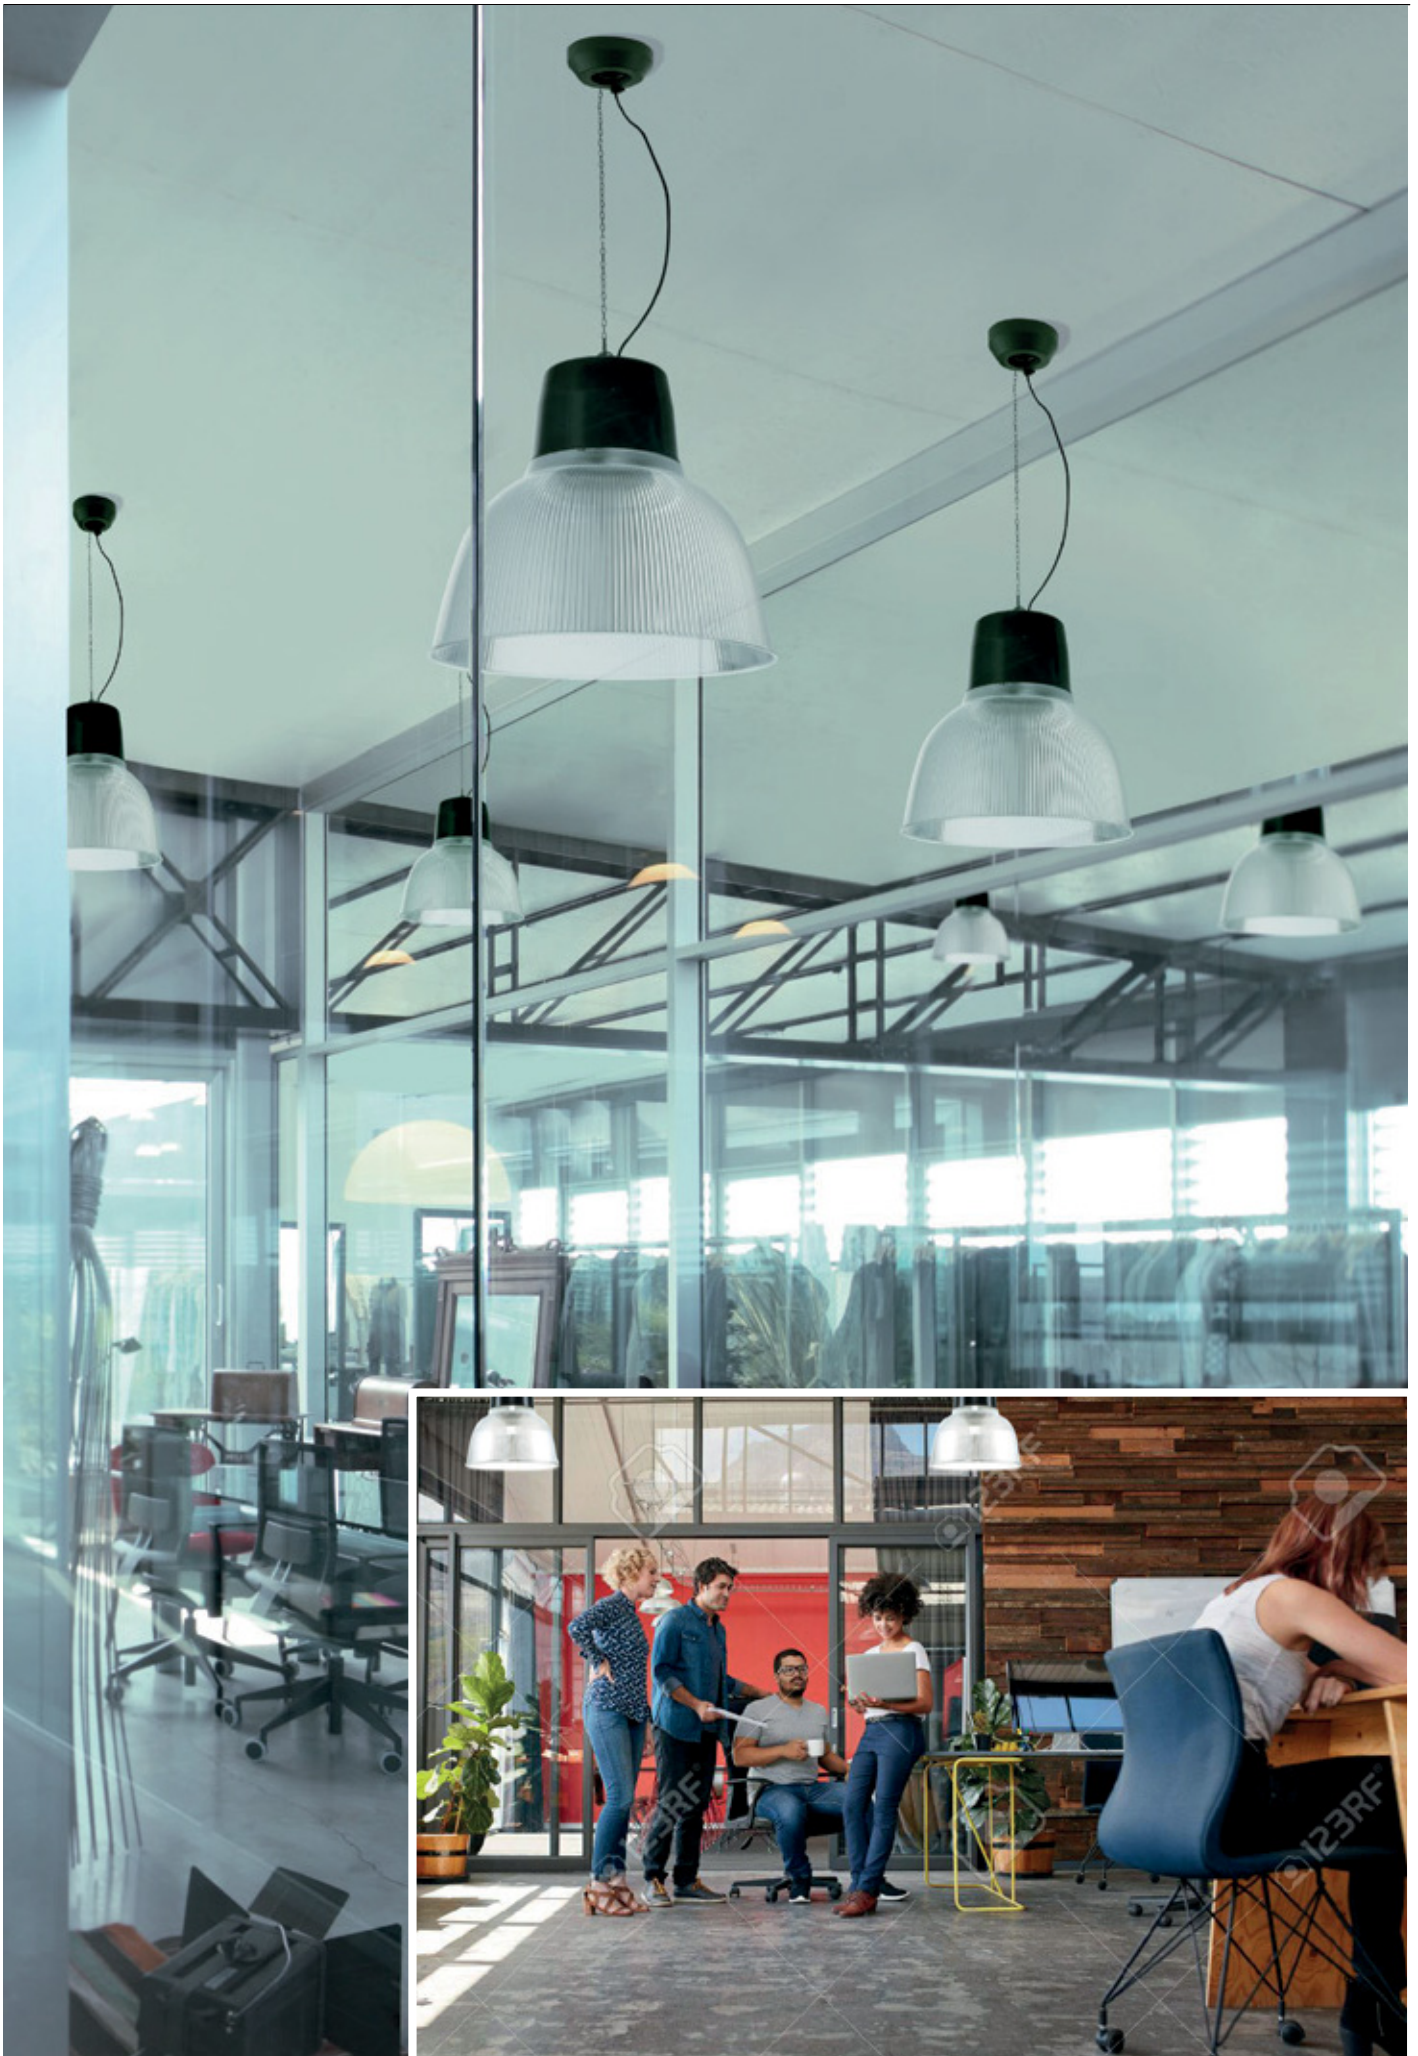

Apparecchi a sospensione, plafone e incasso - Suspension ceiling and recessed lights

Suspension Ceiling Recessed