

# LED Luxxi

A richiesta  
On demand **0-10V**



Serie di proiettori a sospensione con elevata resa cromatica per utilizzo in centri commerciali, supermercati per mettere in risalto i banchi di alimentari, uffici o spazi in coworking, concessionari e grandi aree in genere.

**Corpo:** vano porta componenti in alluminio pressofuso, verniciato a polveri poliestere resistente alla corrosione ed agli agenti atmosferici. Dissipatore in lega di alluminio estruso. Piastra porta cablaggio in acciaio.

**Diffusore:** in policarbonato trasparente internamente prismaticizzato e all'esterno liscio antipolvere per una rapida pulizia, infrangibile e autoestinguente V2.

**Conforme alla norma:** EN60598-1, RGO nessun rischio fotobiologico ai fini della norma EN62471.

**LED:** mantenimento del flusso luminoso minimo al 80%: 50.000h (L80B10).

**Driver:** Incluso > 50.000 h Fattore di potenza ≥0,95.

*Series of suspended projectors with high colour rendering for use in shopping centres, supermarkets to highlight food counters, offices or co-working spaces, dealerships and large areas in general.*

***Body:** component holding body in die-cast aluminium with polyester-powder against corrosion and weathering. Dissipator in extruded aluminium alloy. Steel wiring plate.*

***Diffuser:** in transparent polycarbonate internally prismaticized and smooth dust-proof on the outside for quick cleaning, unbreakable and self-extinguishing V2.*

***Compliant with standard:** EN60598-1, RGO no photobiological risk for the purposes mentioned in standard EN62471.*

***LED:** maintenance of 80% minimum luminous flux: 50,000h (L80B10).*

***Driver:** Included > 50,000 h Power factor ≥0.95.*



Vedi anche LED Minizeus pag.26  
See also LED Minizeus page 26

220-240V 50/60Hz





IK08

IP43

CRI >90





## LED Luxxi 320/A




colour	W			Lm output	K	pcs	Kg	CELL
A N	30	40°	1 LED COB	3500	3000	001	4.90	28155
A N	30	40°	1 LED COB	3500	4000	001	4.90	28155/4K

## LED Luxxi 500



colour	W			Lm output	K	pcs	Kg	CELL
N	80	40°	2 LED COB	9000	3000	001	6.50	28161
N	80	40°	2 LED COB	9000	4000	001	6.50	28161/4K

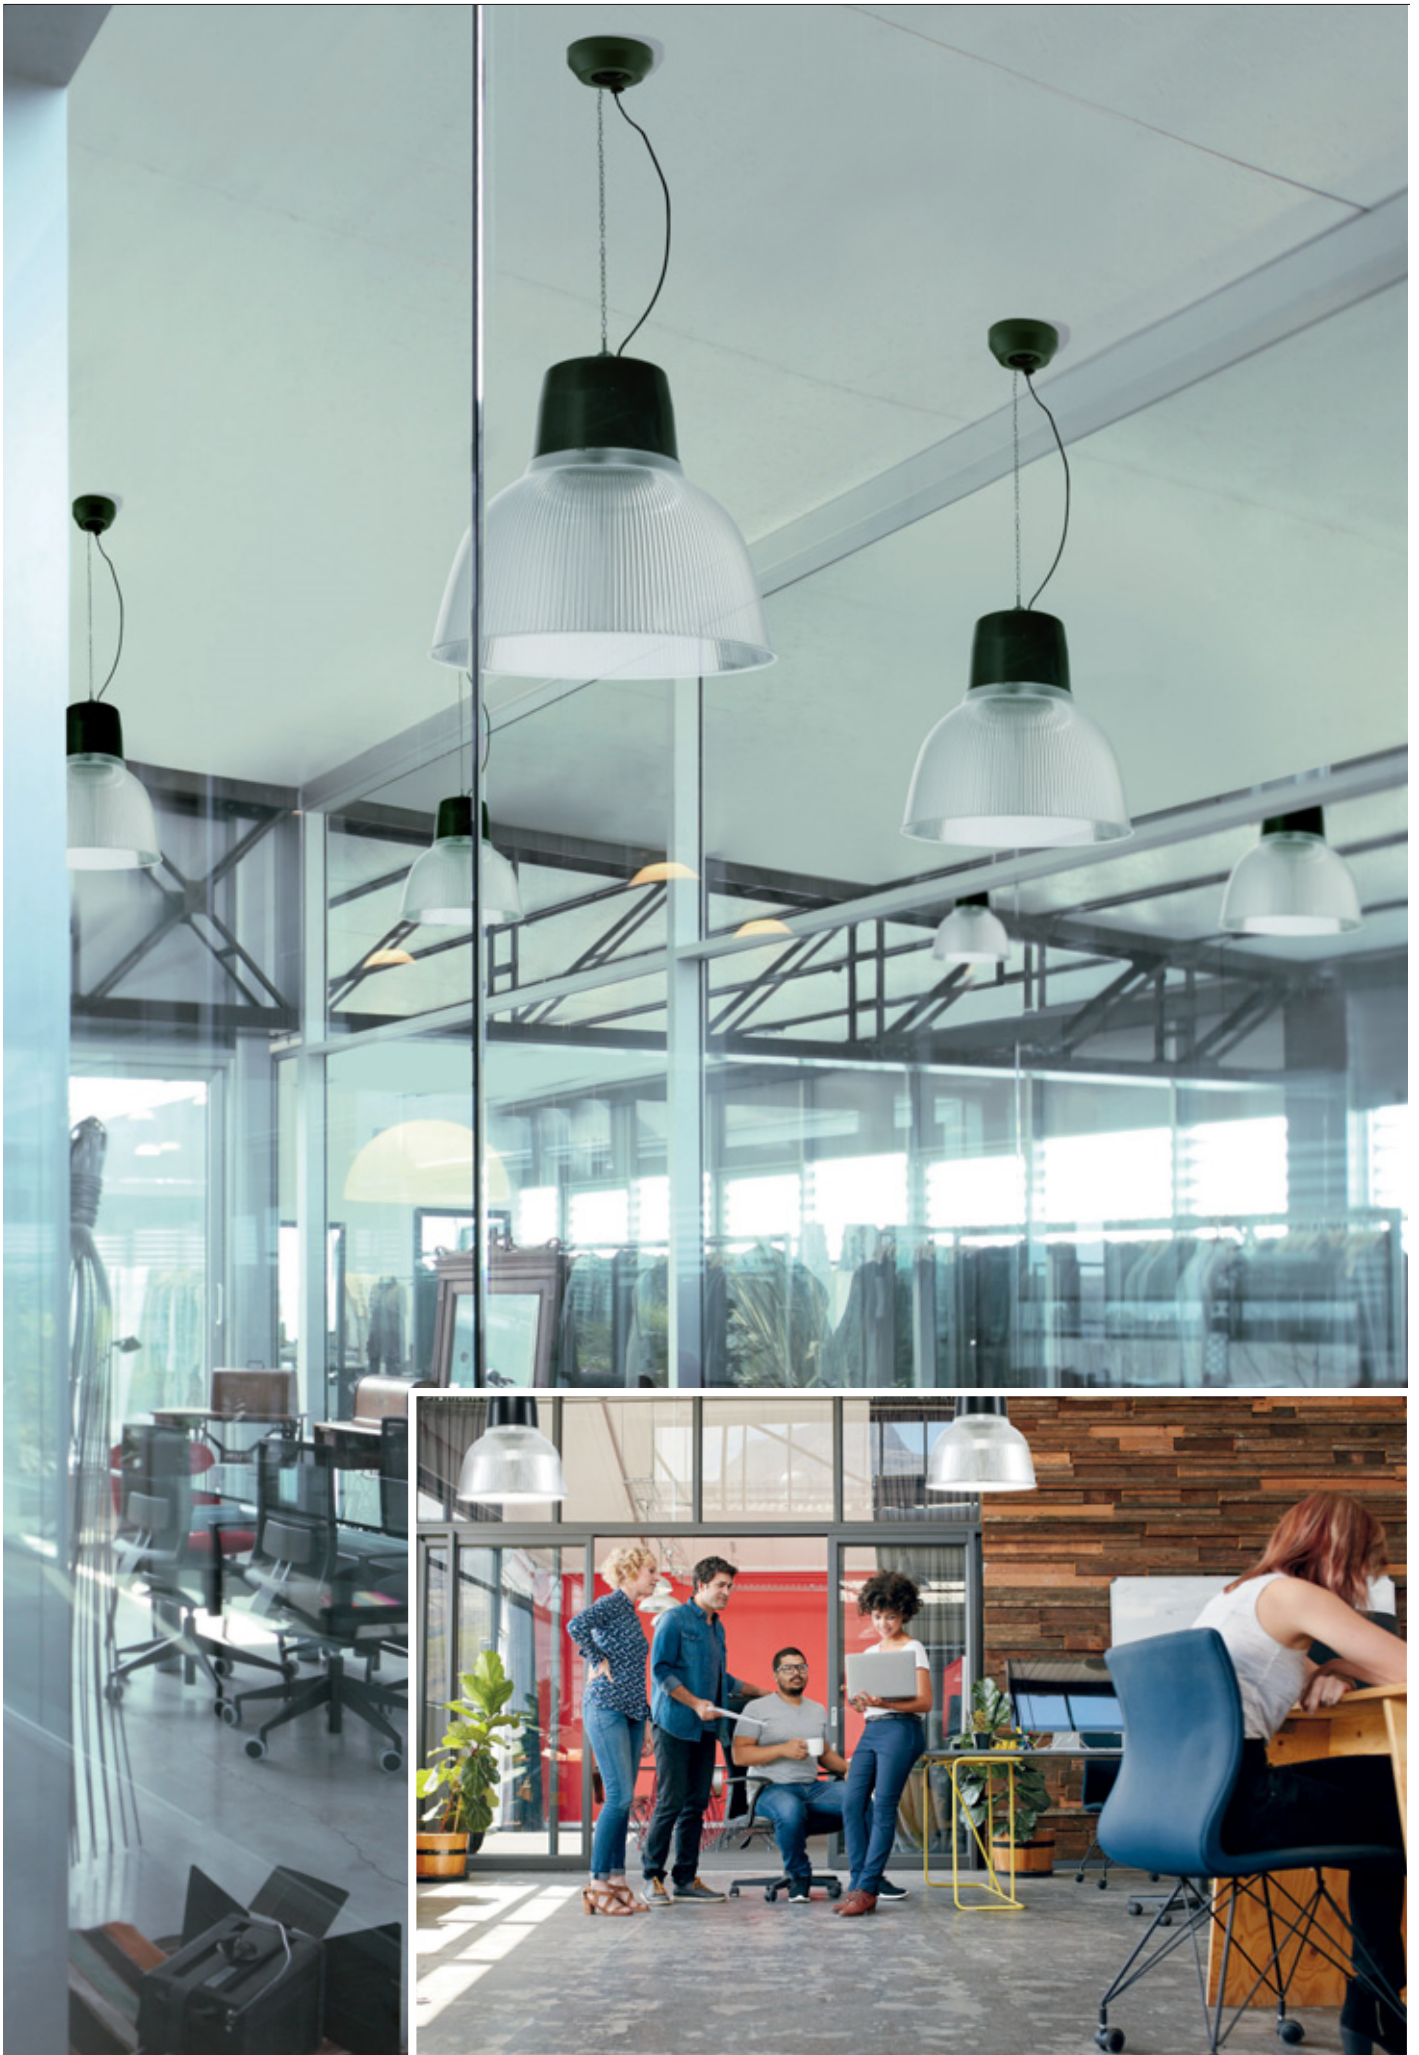

Suspended