

SPECIAL OFFER

Quantitativo minimo **10** pezzi per cod. **Fino ad esaurimento scorte**
 Minimum quantity **10** pieces per cod. **Untill stock last**

LED Otto - LED Life IP54

Apparecchi da incasso progettati per illuminare aree comuni, corridoi, laboratori, sale riunioni, uffici e qualsiasi ambiente dove è necessaria un'illuminazione diffusa. La struttura del faretto è a base tonda o quadrata, ideale per sostituire apparecchi con sorgenti fluorescenti compatte.

Installazione: ad incasso in controsoffitti di cartongesso (completo di staffe di fissaggio).

Corpo e telaio: in alluminio pressofuso UNI 5076, verniciato con polvere termoidurente poliestere.

Staffe di fissaggio: in acciaio.

Viteria: in acciaio.

Verniciatura: di tipo poliestere eseguita a polvere. Colore bianco RAL 9010.

Ottica: diffondente.

Schermo: in lastra tecnopolimero opale

Temperatura di colore: 3000K - 4000K.

Driver: incluso.

Conforme alla norma: EN60598-1, RG0 nessun rischio fotobiologico ai fini della norma EN62471.

Recessed downlights designed to light up common areas, corridors, laboratories, meeting rooms, offices and any other place that requires diffused lighting. The luminaire structure is round or square, ideal to replace fixtures with compact fluorescent lamps.

Installation: recessed use in plasterboard false ceilings (complete with fixing brackets)

body and frame: made by UNI 5076 die-cast aluminum, coated with polyester thermoset powder.

Fixing brackets: made by steel.

Screws: made by steel.

Coating: coated with powdered polyester. RAL 9010 white color.

Optic: diffused.

Shield: opal engineering polymer sheet.

Color temperature: 3000K - 4000K.

Driver: included

According to standard: EN60598-1, RG0 exempt from photo-biological risks in compliance with standard EN62471.

A richiesta
On demand

0-10V





WIRELESS



220-240V 50/60Hz

LED Otto Q3

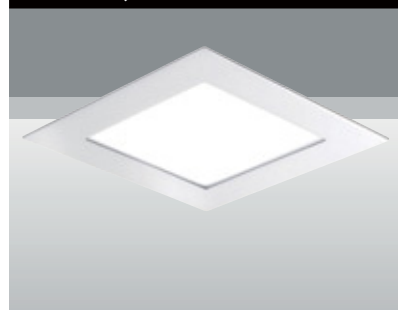


CRI >80



colour	Q..	W		lm output	K	pcs	Kg	CELL	Q.tà	Euro	NET PRICE
B	Q3	21	Led SMD	1.890	3000	001	0,50	25919/3000	1.751	45,00	PROMO € 8,00

LED Otto T1 - T2



220-240V 50/60Hz




CRI >80



colour	T..	W		lm output	K	pcs	Kg	CELL	Q.tà	Euro	NET PRICE
B	T1	12	Led SMD	1.080	3000	001	0,30	25916/3000	573	28,00	PROMO € 4,00
IP44	B	T2	Led SMD	1.620	4000	001	0,40	25917/44	3.830	35,00	PROMO € 6,00

LED Life Q IP44



500±100mA



CRI >80



colour	W	mA			lm output	K	pcs	Kg	CELL	Q.tà	Euro	NET PRICE
B	24	700	Led SMD	100°	1500	3000	001	0.57	24393/ECO	300	60,00	PROMO € 10,00

Quantitativo minimo 10 pezzi per cod. Fino ad esaurimento scorte - Minimum quantity 10 pieces per cod. Untill stock last

SPECIAL OFFER