

# LED Parigi

Apparecchio a LED per utilizzo indoor e outdoor ad incasso, a pavimento/terreno, parete e soffitto. Prodotto non idoneo per l'installazione in piscine e fontane. Lo stesso prodotto, se dotato di un accessorio staffa, può essere utilizzato come proiettore architettonico.

**Installazione:** a pavimento con controcassa, a soffitto con alette di fissaggio

**Fascio ottico:** regolabile da 20° a 60° grazie ad un sistema di regolazione manuale retrostante o asimmetrico.

**Corpo e cornice:** in acciaio Inox AISI 304 senza viti a vista

**Diffusore:** in vetro trasparente temprato

**Guarnizione:** in gomma siliconica.

**Carrabilità:** resistenza al carico statico 2.000 Kg tramite controcassa ordinabile separatamente

**Alimentazione:** a bassa tensione di sicurezza in corrente costante (350mA). Da ordinare separatamente.

**Sorgente:** LED **SAMSUNG**

*LED fixture for indoor and outdoor recessed, floor / ground, wall and ceiling use. Product not suitable for installation in swimming pools and fountains.*

*The same product, if equipped with a bracket accessory, can be used as an architectural projector.*

*Installation: on the floor with outer casing, on the ceiling with fixing tabs*

*Optical beam: adjustable from 20° to 60° thanks to a manual adjustment system behind it or asymmetric.*

*Body and frame: in AISI 304 stainless steel without visible screws*

*Diffuser: in transparent tempered glass*

*Gasket: in silicone rubber.*

*Drive over: resists the static load 2,000 kg through the outer casing, which can be ordered separately*





*Power supply: low voltage safety constant current (350mA). To be ordered separately.*

*Source: LED **SAMSUNG***



220-240 Vac	110 Vac a richiesta on demand	50/60 Hz	IP67	IK10	CRI >80	+40°C -20°C	III	CE	DRIVER NOT INCLUDED
850°									

colour	W	mA	Optic	K	lm output	lm/W	pcs	Kg	S + L
<b>B</b>	2	350	10/60°	3000	280	140	1	0,09	27184N
<b>B</b>	2	350	10/60°	4000	280	140	1	0,09	27184/4KN
<b>S</b>	2	350	10/60°	3000	280	140	1	0,09	27160N
<b>S</b>	2	350	10/60°	4000	280	140	1	0,09	27160/4KN

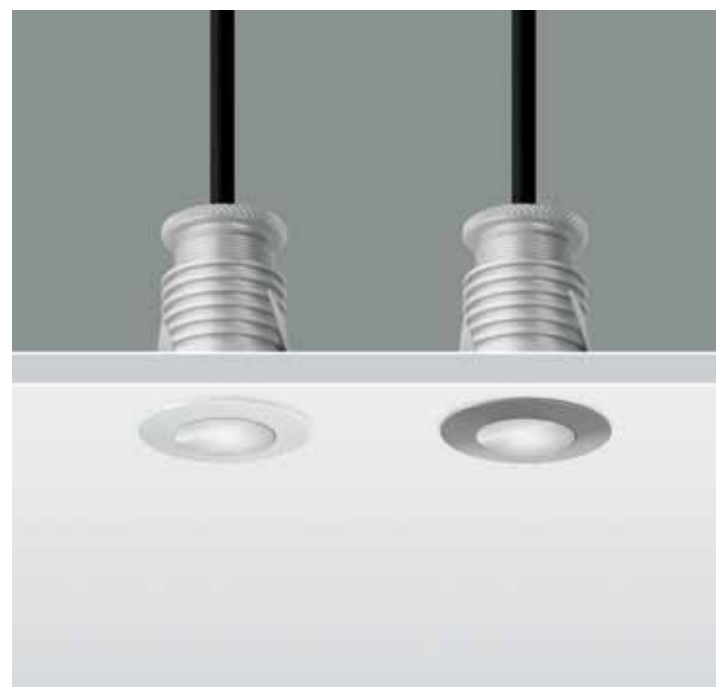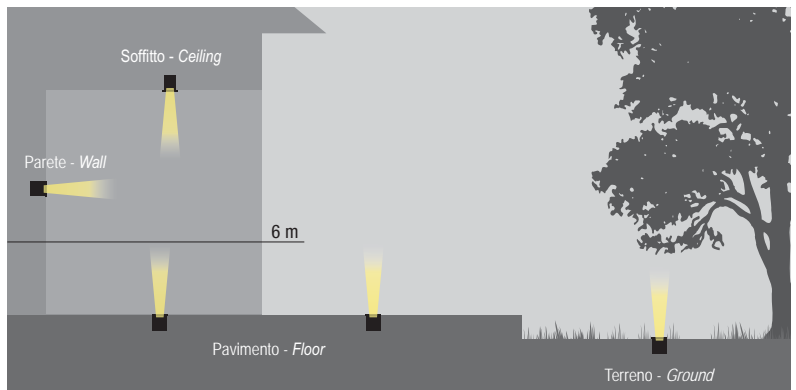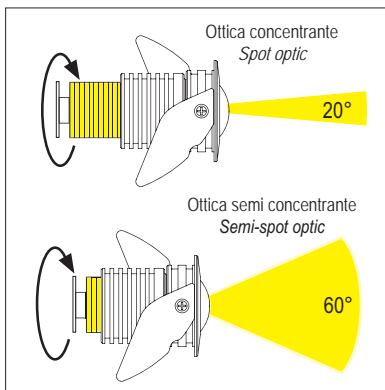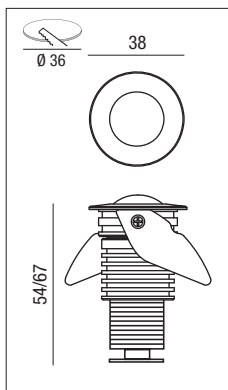

Recessed

# LED Parigi ASY




220-240 Vac	110 Vac a richiesta on demand	50/60 Hz	IP67	IK10	CRI >80	+40°C -20°C	III	CE	DRIVER NOT INCLUDED
85°									

colour	W	mA	Optic	K	lm output	lm/W	pcs	Kg	S + L
B	2	350	10/60°	3000	280	140	1	0,09	27184N/ASY
B	2	350	10/60°	4000	280	140	1	0,09	27184/4KN/ASY
S	2	350	10/60°	3000	280	140	1	0,09	27160N/ASY
S	2	350	10/60°	4000	280	140	1	0,09	27160/4KN/ASY

## LED Parigi, accessori NON inclusi - NOT INCLUDED accessory LED Parigi wall




**Cod. 27176**  
**Staffa a parete**  
 Montaggio a parete orientabile  
**Wall bracket**  
 Adjustable wall mounting

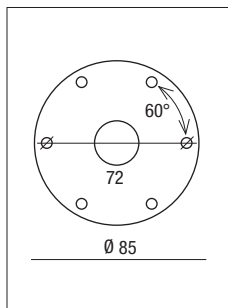



**Cod. 04120002**  
 Ghiera acciaio inox 316  
 Stainless steel setting ring 316





**Cod. 27173**  
 Cassaforma per installazioni su terreno.  
 Formwork for ground installations.

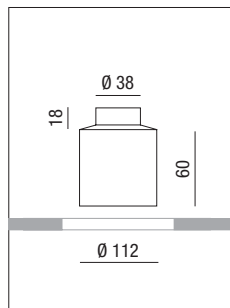

**Cod. 27243**  
 Cassaforma per installazioni su muratura.  
 Formwork for walling installations.

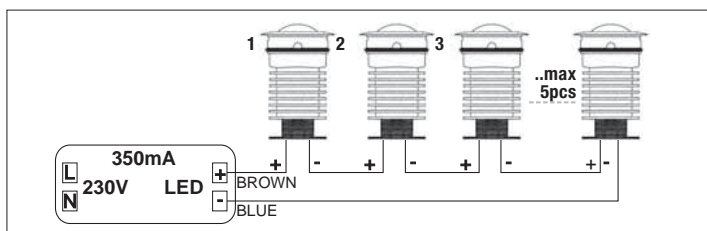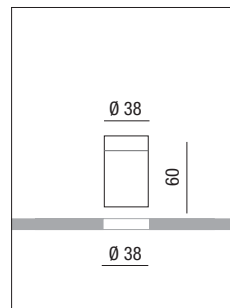

**Cod. RN9150-2 - Max 15W - 350mA**  
 Driver per collegamento in serie - Drivers for series connection

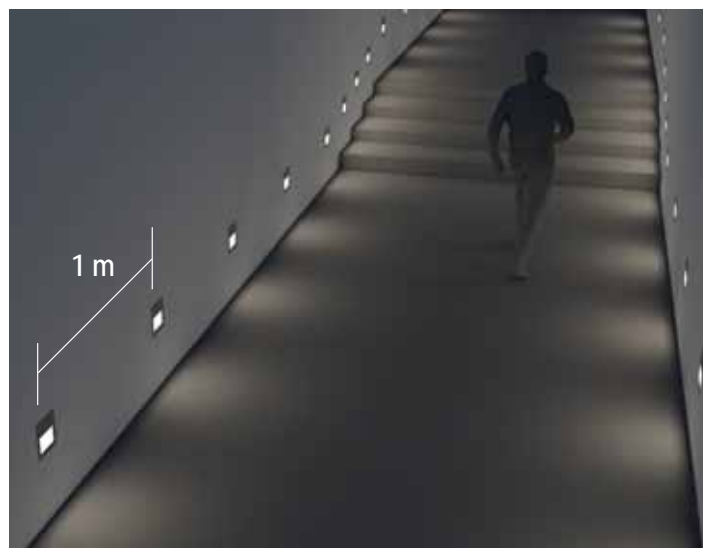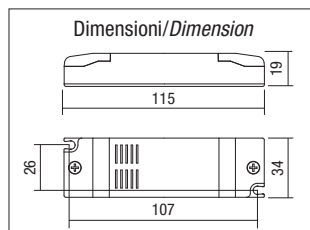

Recessed



