

LED Primadonna S



Proiettori orientabili progettati per illuminare spazi commerciali (supermercati, grandi magazzini, retail, ecc.), uffici e qualsiasi ambiente dove è necessaria un'illuminazione generale e d'accento.

Installazione: a sospensione (completo di rosone di fissaggio).

Corpo: in alluminio pressofuso UNI 5076, verniciato con polvere termoisolante poliestere.

Verniciatura: di tipo poliestere eseguita a polvere. Colore nero RAL 9005 o Bianco RAL 9010.

Ottica: semi concentrante (a richiesta concentrante).

Schermo: vetro temperato di spessore 3mm.

Driver: incorporato.

Conforme alla norma: EN60598-1, RGO nessun rischio fotobiologico ai fini della norma EN62471.

Led: LUMILEDS - PHILIPS mantenimento del flusso luminoso minimo al 80%: 50.000h (L80B10).

Series of adjustable projectors designed to light up retail spaces (supermarkets, department stores, shops, etc.), offices and any other place that requires general and spot lighting.

Installation: for suspension (complete with ceiling rose).

Body: made by UNI 5076 die-cast aluminum, coated with polyester thermoset powder.

Coating: coated with powdered polyester. RAL 9005 black or RAL 9010 white color.

Optic: semi-clumping (clumping on demand).

Shield: tempered glass with 3mm thickness.

Driver: included.

According to standard: EN60598-1, RGO exempt from photo-biological risks in compliance with standard EN62471.

Led: LUMILEDS - PHILIPS maintenance of minimum luminous flux to 80%: 50.000h (L80B10).




220-240V 50/60Hz



IK07

IP20

LED Primadonna S

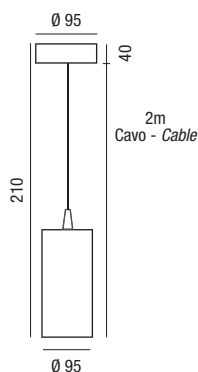

A richiesta: dimmerabile
On demand: *dimmable*



CRI >90



colour	W		lm output	K		 on demand	pcs	Kg	CELL
B	30	Led COB	3000	3000	40°	24°	001	1,44	32920/30/S
B	30	Led COB	3000	4000	40°	24°	001	1,44	32920/30/S/4K
N	30	Led COB	3000	3000	40°	24°	001	1,44	32922/30/S
N	30	Led COB	3000	4000	40°	24°	001	1,44	32922/30/S/4K



Accessori non inclusi - Not included accessories



**Adattatore meccanico a 4 conduttori
Electro-Mechanical 4 conductor adapter**

Colour	A	pcs	Kg	Code
B	max 10Kg	010	0,05	9009-4/W
B	Nippel per sospensione			S-9009/BC-W

Suspended