

# LED Retail

Design by Ezio Didone



Serie di faretti di forma geometrica semplice ma originale, in applicazione soffitto o applique di forma tonda a cubo o cono, di facile applicazione e ottima come luce direzionale ad illuminare spazi commerciali o ambienti domestici.

Disponibile nei colori, bianco RAL9010, nero RAL9005 (a richiesta per quantità, tempo di consegna 60 giorni).

Adatti per musei, negozi, esposizioni, nessuna emissione di raggi UV o infrarossi (col tempo non scoloriscono né scaldano gli oggetti).

**Corpo:** in lega di alluminio ossidato verniciata a polvere.

**Diffusore:** con riflettore alluminio 25° e 40°.

**Schermo:** vetro temperato di spessore 3mm

**Temperatura di colore:** 3000K e 4000K.

**Conforme alla norma:** EN60598-1, RG0 nessun rischio fotobiologico ai fini della norma EN62471.

**Led:** CREE mantenimento del flusso luminoso minimo al 80%: 50.000h (L80B10).

**Driver:** incluso  Fattore di potenza ≥0,95.

*Series of spotlights with a simple but original geometric shape, in ceiling or wall lamp configuration with a round cube or cone shape, easy to install and excellent as a directional light to illuminate commercial spaces or domestic environments.*

*Available in white RAL9010, black RAL9005 colours (on demand for quantities, delivery time 60 days).*

*Suitable for museums, shops and displays, no UV ray or infra-red emissions (they do not cause objects to fade or heat up over time).*

**Body:** powder-coated oxidised aluminium alloy.

**Diffuser:** with aluminium reflector 25° and 40°.

**Screen:** 3mm thick tempered glass

**Colour temperature:** 3000K and 4000K.

**Compliant with standard:** EN60598-1, RG0 no photobiological risk for the purposes mentioned in standard EN62471.

**LED:** maintenance of 80% minimum luminous flux: 50,000h (L80B10).

**Driver:** included  ≥0.95 Power factor.

A richiesta  
On demand

WIRELESS

Bluetooth

Vedi pag. 266  
See page 266

220-240V 50/60Hz




IK07


IP20

LED Retail trifase U-BOOT

12



DRIVER INCLUDED



CRI >90



colour	W		lm output	K		pcs	Kg	CELL
B	30	Led COB	3000	3000	25°	001	1,30	32555
B	30	Led COB	3000	3000	40°	001	1,30	3255540
DALI 2	B	Led COB	3000	3000	25°	001	1,30	32555DA
DALI 2	B	Led COB	3000	3000	40°	001	1,30	32555DA40
B	30	Led COB	3000	4000	25°	001	1,30	325554K
B	30	Led COB	3000	4000	40°	001	1,30	325554K40
DALI 2	B	Led COB	3000	4000	25°	001	1,30	325554KDA
DALI 2	B	Led COB	3000	4000	40°	001	1,30	325554KDA40


NEW

Con driver a scomparsa U-BOOT  
With hidden U-BOOT driver




Dati fotometrici - Photometric data


LED Retail - 25°

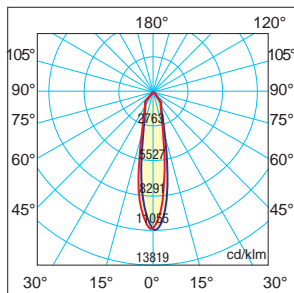

LED Retail - 40°

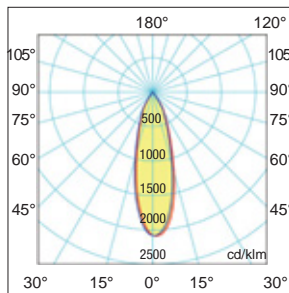

Orientabilità - Adjustability

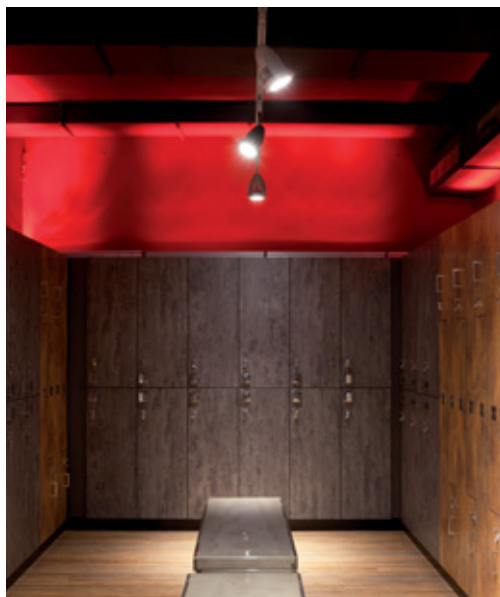

Track light