


# 3S Syros slim system R

A richiesta  
On demand

0-10V



WIRELESS

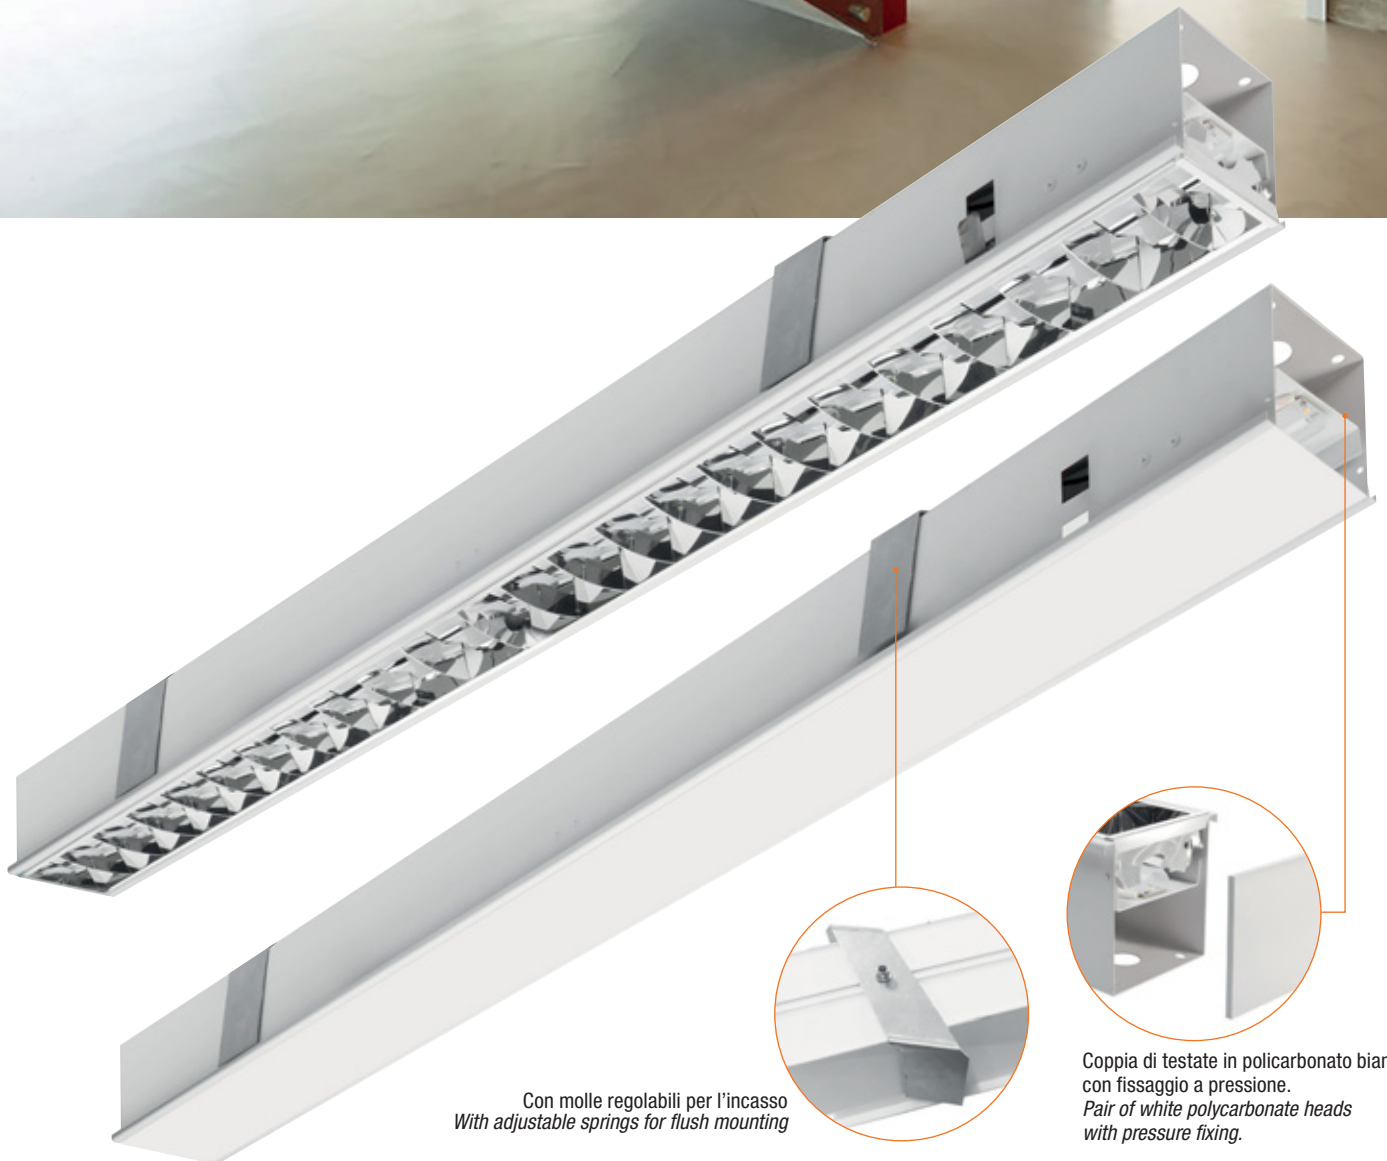



Con molle regolabili per l'incasso  
With adjustable springs for flush mounting

Coppia di testate in policarbonato bianco  
con fissaggio a pressione.  
Pair of white polycarbonate heads  
with pressure fixing.




Recessed

## 3S Syros slim system R



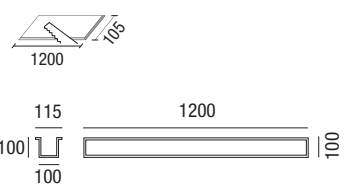
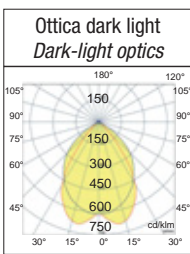
220-240V 50/60Hz   850°  **IK07** **IP40**






**CRI 90**  **DRIVER INCLUDED**  
**MULTIPOWER**  

	colour	W max	N°Led SMD	Vac	lm output	lm/W	K	pcs/pallets	Kg	CELL
	B	40	504 led 3528	220-240	5100	127	4000	60	4.50	25933/SL
<b>0-10V</b>	B	40	504 led 3528	220-240	5100	127	4000	60	4.50	25933/SL/DIM
	B	40	504 led 3528	220-240	5100	125	4000	60	4.50	25933/SL/DALI
	B	60	504 led 3528	220-240	7200	120	4000	60	4.50	25934/SL
<b>0-10V</b>	B	60	504 led 3528	220-240	7200	120	4000	60	4.50	25934/SL/DIM
	B	60	504 led 3528	220-240	7200	120	4000	60	4.50	25934/SL/DALI
	B	85	504 led 3528	220-240	10100	126	4000	60	4.50	25935/SL
<b>0-10V</b>	B	85	504 led 3528	220-240	10100	126	4000	60	4.50	25935/SL/DIM
	B	85	504 led 3528	220-240	10100	126	4000	60	4.50	25935/SL/DALI

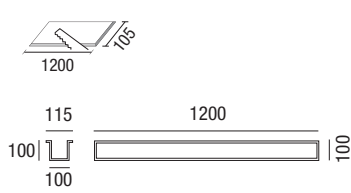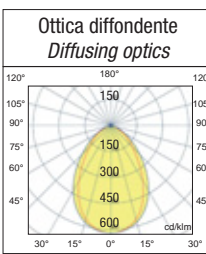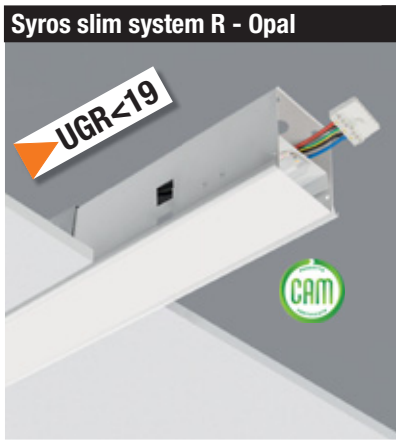**EMERGENCY**  Per lampade cablate in emergenza (aggiungere **/EM** dopo il codice) sovrapprezzo del 20%.  
For wired emergency lights (add **/EM** after the code) 20% extra charge.



**CRI 90**  **DRIVER INCLUDED**  
**MULTIPOWER**  



	colour	W max	N°Led SMD	Vac	lm output	lm/W	K	pcs/pallets	Kg	CELL
	B	40	504 led 3528	220-240	5100	127	4000	60	4.50	25940/SL
<b>0-10V</b>	B	40	504 led 3528	220-240	5100	127	4000	60	4.50	25940/SL/DIM
	B	40	504 led 3528	220-240	5100	125	4000	60	4.50	25940/SL/DALI
	B	60	504 led 3528	220-240	7200	120	4000	60	4.50	25942/SL
<b>0-10V</b>	B	60	504 led 3528	220-240	7200	120	4000	60	4.50	25942/SL/DIM
	B	60	504 led 3528	220-240	7200	120	4000	60	4.50	25942/SL/DALI
	B	85	504 led 3528	220-240	10100	126	4000	60	4.50	25943/SL
<b>0-10V</b>	B	85	504 led 3528	220-240	10100	126	4000	60	4.50	25943/SL/DIM
	B	85	504 led 3528	220-240	10100	126	4000	60	4.50	25943/SL/DALI

**EMERGENCY**  Per lampade cablate in emergenza (aggiungere **/EM** dopo il codice) sovrapprezzo del 20%.  
For wired emergency lights (add **/EM** after the code) 20% extra charge.



Recessed

# 3S Syros slim system R installazione - *installation*


3S Syros slim system R - Incasso / recessed

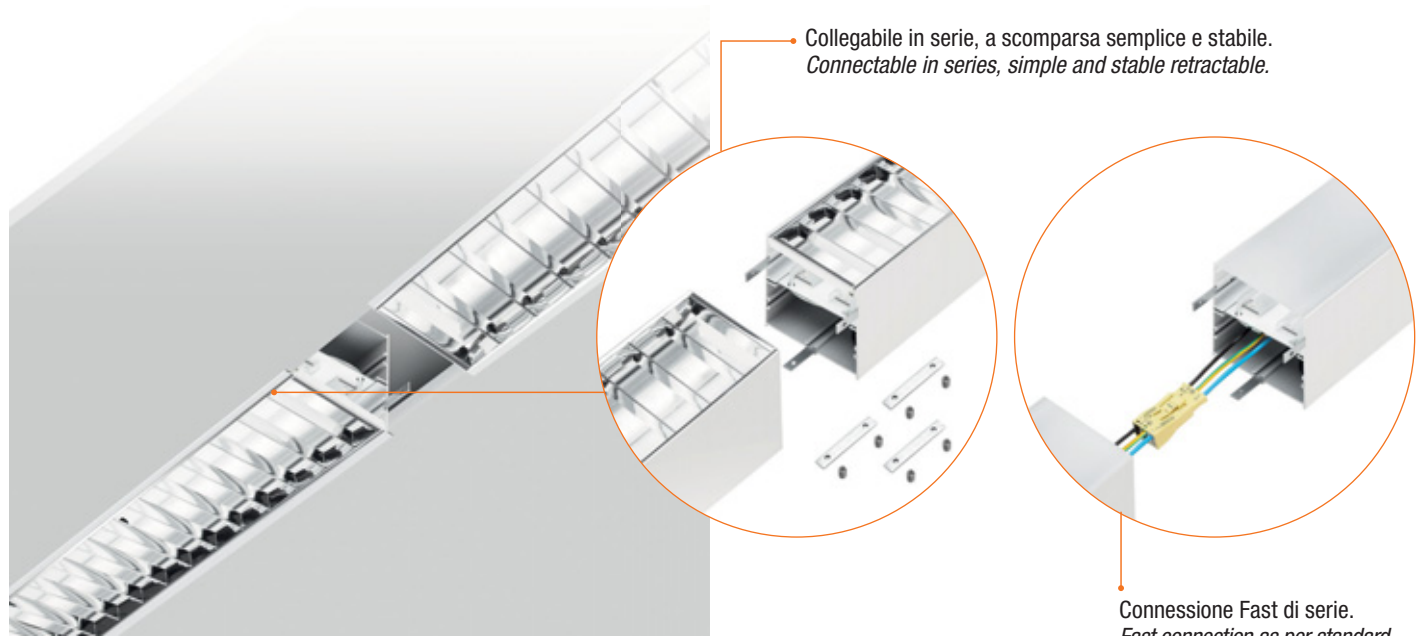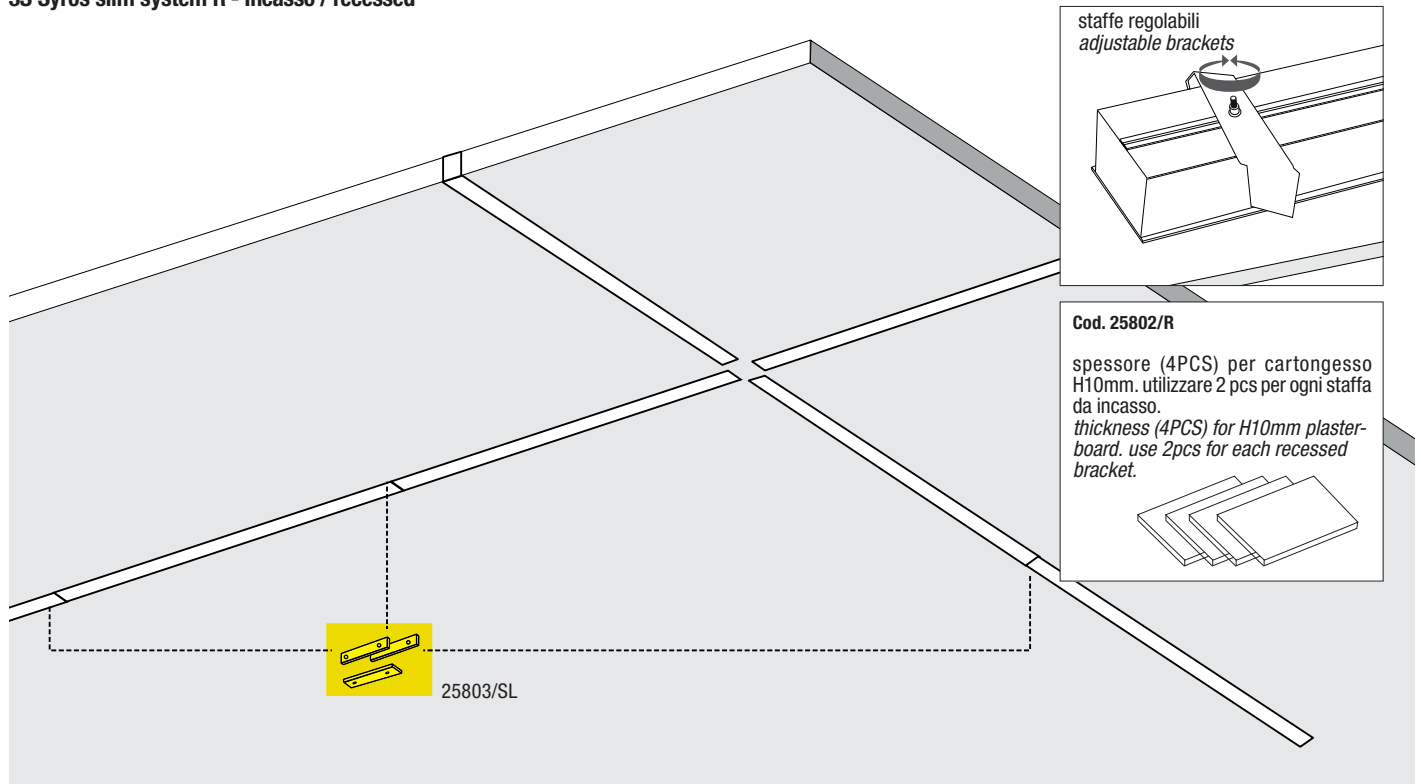

## Accessori non inclusi - *Not included accessories*

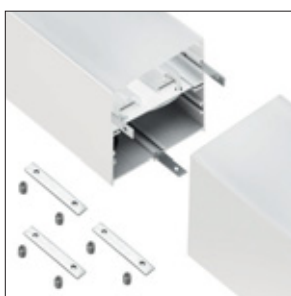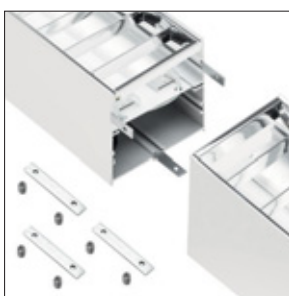

**Cod. 25803/SL**  
**Kit giunto lineare a scomparsa (3pcs)**  
In lamiera di acciaio zincato, fissaggio con viti.  
**Retractable linear coupler kit (3pcs)**  
In galvanised steel sheet, fixing with screws.



**Cod. 25804/Endcaps**  
**Testate terminali (2pcs)**  
In lamiera di acciaio zincato, fissaggio con viti.  
**End caps (2pcs)**  
In galvanised steel sheet, fixing with screws.

