



LED Trim Opal trifase

NEW



Orientabilità - Adjustability

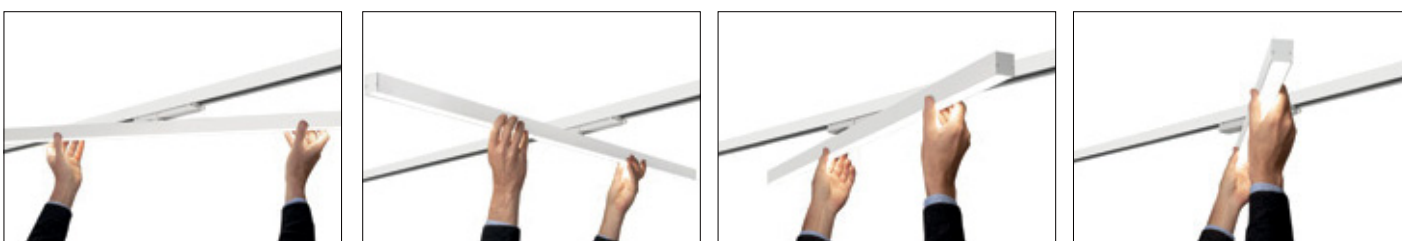


Serie Trim pensati per ambienti domestici, commerciali, uffici, scuole, ristoranti.

Corpo: in alluminio estruso ossidato (colore tipo RAL 9006).

Lo schermo è in tecnopolimero opale.

Installazione: su binario trifase Eurostandard.

Alimentazione: Driver multipower  a scomparsa incluso

Ottica: Apertura del fascio 100°.

Conforme alla norma: EN60598-1, RG0 nessun rischio fotobiologico ai fini della norma EN62471.

Led: striscia continua di Led SAMSUNG 3528, mantenimento del flusso luminoso minimo al 80%: 50.000h (L80B10).


The products of the Trim range can be installed in all domestic and commercial spaces, offices, schools, restaurants.

Body: oxidized extruded aluminium (RAL 9006) .

Technopolymer screen Opal finish.

Installation: on three-phase Eurostandard tracks.

Reflector: optic integrated in light source for the other versions.

Power supply: hidden driver multipower  included.

Optics: 100 ° beam opening.


According to standard: EN60598-1, RG0 exempt from photo-biological risks in compliance with standard EN62471.







Led: continuous strip Led SAMSUNG 3528, maintenance of minimum luminous flux to 80%: 50.000h (L80B10).

LED Trim Opal trifase



CRI >80



colour	W			lm	K	pcs	Kg	CELL	Euro
B	30	100°	Led SMD	3000	3000	001	0.7	793424/3K	180,00
B	30	100°	Led SMD	3000	4000	001	0.7	793424/4K	180,00
 B	30	100°	Led SMD	3000	3000	001	0.7	793424/3KDALI	210,00
 B	30	100°	Led SMD	3000	4000	001	0.7	793424/4KDALI	210,00
N	30	100°	Led SMD	3000	3000	001	0.7	793425/3K	180,00
N	30	100°	Led SMD	3000	4000	001	0.7	793425/4K	180,00
 N	30	100°	Led SMD	3000	3000	001	0.7	793425/3KDALI	210,00
 N	30	100°	Led SMD	3000	4000	001	0.7	793425/4KDALI	210,00

12

Trim disegno esploso - Trim exploded drawing

