

LED Tron



Apparecchi di illuminazione a led per applicazioni a luce diffusa.

La forma morbida e le elevate prestazioni illuminotecniche consentono a questi apparecchi di illuminazione di poter essere collocati in molteplici tipologie di installazione siano esse residenziali (cucine, aree di servizio) o terziarie (uffici direzionali, open space, aree comuni, negozi, magazzini).

Corpo: in alluminio estruso con finitura anodizzata naturale e tappi in tecnopolimero stampato.

Dissipatore: in lastra di alluminio.

Diffusore: in lastra di tecnopolimero opalino.

Conforme alla norma: EN60598-1, RG0 nessun rischio fotobiologico ai fini della norma EN62471.

Led: mantenimento del flusso luminoso minimo al 80%: 50.000h (L80B10).

Driver: Incluso.

Led lighting appliances for diffused light applications.

The soft shape and high lighting performance allow these lighting appliances to be placed in many types of installations, either residential (kitchens, service areas) or tertiary (managerial offices, open spaces, shared areas, stores, warehouses).

Body: in extruded aluminium with natural anodised finish and steel caps printed technopolymer.

Dissipater: in aluminium plate.

Shade: in opal technopolymer.

According to standard: EN60598-1, RG0 exempt from photo-biological risks in compliance with standard EN62471.

Led: maintenance of minimum luminous flux to 80%: 50.000h (L80B10).

Driver: Included.



Apparecchi a sospensione, plafone e incasso
Suspension ceiling and recessed lights

Suspension
Ceiling recessed

A richiesta
On demand

0-10V



WIRELESS



220-240V 50/60Hz




650°



IK04

IP20

LED Tron C/Blindosbarra - Ceiling/Busway



CRI >80

A richiesta
CRI >90
On request



colour	W		lm		K	pcs	Kg	CELL	Euro
A	40	Led SMD	5200	100°	4000	001	2,90	27331	115,00
A	50	Led SMD	6500	100°	4000	001	3,60	27248	120,00
A	60	Led SMD	8200	100°	4000	001	3,60	27248/60	150,00
A	80	Led SMD	9800	100°	4000	001	3,60	27248/80	180,00

Accessori inclusi - Included accessories

Tron C/Blindosbarra: Corredato di un Kit che contiene due tige in acciaio D.10mm / lunghezza 110mm (fig.A); due attacchi a parete/plafone in acciaio cromato (fig.B); un Rosone in tecnopolimero dove alloggiare il cavo elettrico tripolare 3x0,75mmq con guaina trasparente ed i dispositivi elettrici per la connessione alla rete di alimentazione elettrica (fig.C).

Tron C/Busway: Supplied with a kit that contains two steel stems D.10mm / length 110mm (fig.A); two chrome-plated steel wall/ceiling brackets (fig.B); an engineering polymer ceiling rose which houses three-pole power cable 3x0,75sq.mm with transparent sheath and electrical devices for connection to the mains supply (fig.C).

Accessori non inclusi - Not included accessories

Gli aricoli **Tron C/Blindosbarra** sono dotati di un sistema meccanico che ne consente il fissaggio alle comuni blindosbarre presenti sul mercato; se si deve eseguire questa tipologia di installazione, utilizzare le molle specifiche date a corredo della blindosbarra scelta (Fig. D), fissandole a TRON come da istruzioni d'uso e manutenzione.

Tron C/Busway items are equipped with a mechanical system that allows fastening to common busways available on the market. If this type of installation is to be carried out, utilise the specific springs supplied as standard with the chosen busway (Fig. D), and fasten them to TRON as per the use and maintenance instructions.

Fig. A



Fig. B



Fig. C



Versione C - C Version

Fig. D



KITB51 - Euro 3,00
Per versione C/Blindosbarra
For C/Blindosbarra Version

220-240V 50/60Hz




650°



IK04

IP20

LED Tron Sospensione/Suspension

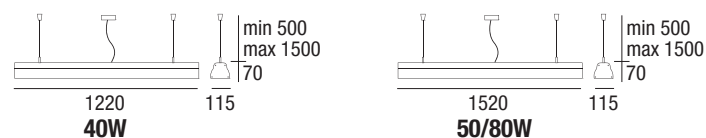

CRI >80

A richiesta
CRI >90
On request



colour	W		lm		K	pcs	Kg	CELL	Euro
A	40	Led SMD	5200	100°	4000	001	2,90	27331/S	115,00
A	50	Led SMD	6500	100°	4000	001	4.50	27249	120,00
A	80	Led SMD	9800	100°	4000	001	4.50	27235	180,00