



# Aura WC 400 LED



p.362  
p.363

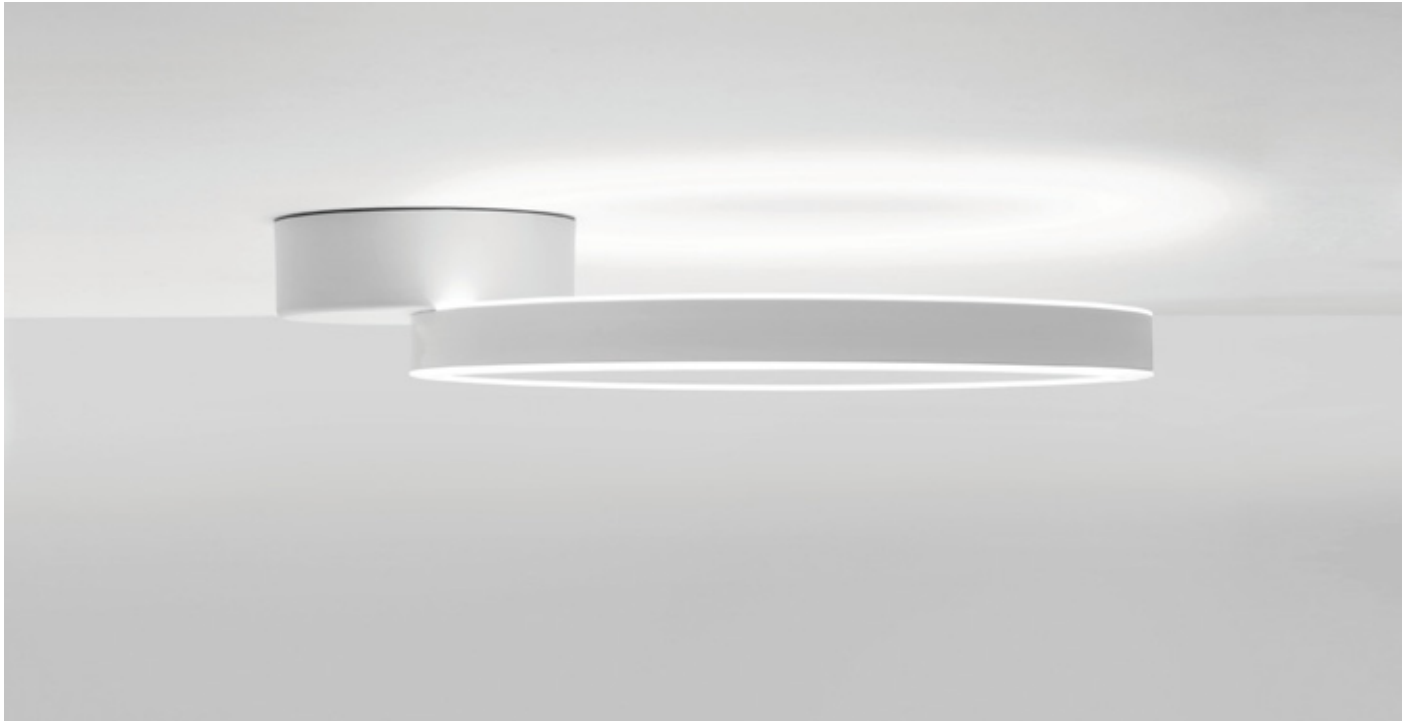

Lampada LED a plafone o a parete, coordinata col modello a sospensione. Anello in alluminio con Led SMD. Con diffusore in gomma ai siliconi, ottica diffondente opale. Applique basculante con luce diretta ed indiretta a creare un effetto sulla parete morbido e confortevole.

**Colore:** 5 colori disponibili bianco lucido RAL 9010, nero opaco RAL 9004, grigio RAL9006, oro satinato, rosso ferrari RAL3020 (a richiesta).

**LED driver:** compreso.

**Comando:** con normale interruttore ON-OFF (2 fili + terra).

**Temperatura di colore:** colorazione standard bianco caldo 3000K a richiesta 4000K o 6000K.

Ceiling or wall LED lamp, coordinated with pendant model. Aluminium ring with SMD LED. With silicon rubber diffusers, opal diffuser optics. Tilting wall lamp with direct and indirect light creating a soft and comfortable effect on the wall.

**Colour:** 5 colours available: Polished white RAL 9010, opal black RAL 9004, grey RAL9006, satin gold, ferrari red RAL3020 (on request).

**LED driver:** included.

**Control:** with normal ON-OFF switch (3 wires + earth).

**Colour temperature:** standard warm white 3000K on demand 4000K or 6000K.

## A richiesta On request



A richiesta 4000K o 6000K con sovrapprezzo 10%  
**tempo di consegna 45gg.**

On demand 4000K or 6000K with 10% extra charge,  
delivery time 45 days.



Versioni dimmerabili DALI con sovrapprezzo 10%,  
**tempo di consegna 45gg.**

Dimmable DALI versions with 10%  
extra charge delivery time 45 days.

▶ UGR ≤22

AURA WC 400 LED

Euro cad.

□ 804002-3KB

300,00

■ 804001-3KN

360,00

■ 804001-3KG

400,00

■ 804001-3KO

400,00

Sorgente  
Source



Potenza  
Total power

34W  
(17W+17W)

Temperatura di colore  
Color temperature

3000K

Flusso luminoso max.  
Lighting output max.

1360Lm  
(40lm/W)

CE IK07 IP20 CELL

220-240V 50/60Hz DRIVER INCLUDED



