




Componi il tuo Spot Direction! Compose your Spot Direction!



Scegli il faretto del colore che desideri e abbinalo al portalampada e alla lampadina a LED
Choose the spotlight the colour you want and match it to the lamp holder and to the LED lightbulb


Direction 230V

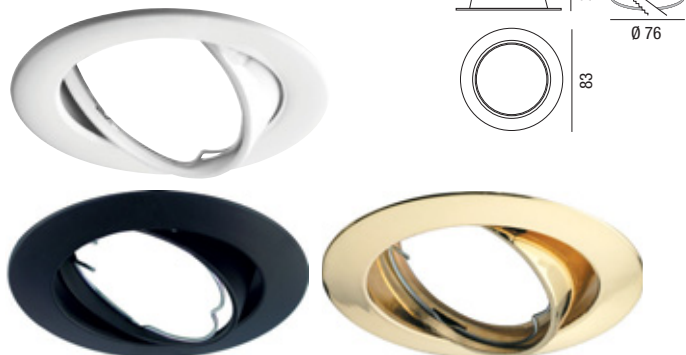

Spot Direction

colour	pcs	Kg	Code S	Euro cad.
B	050	0.10	24521/B	4,00
N	050	0.10	24490	4,00
O	050	0.10	24525	4,00

Kit completo Spot e lampadina a LED
Complete Spotlight and LED lightbulb kit

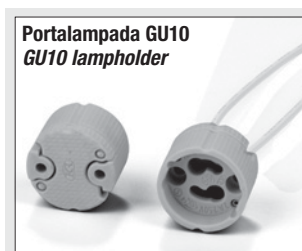

Portalampada GU10
GU10 lampholder



Lampada LED GU10
LED GU10 bulb

Ø D
mm
50mm



Code	Euro Cad.
51GU10/B/25/T	4,00

W	V	◀	K	LED OK	lm	cd	◀	H mm	PCS	Conf. Pack	Cod.	Euro cad.
4 ≈ (50)	220÷240	45°	3000	1	330	520	SI	75,6	10	ASF	555248.0101	2,00
7 ≈ (50)	220÷240	36°	4000	1	450	880	NO	56	10	ASN	555304.0101	5,00
7 ≈ (50)	220÷240	36°	3000	1	450	850	SI	56	10	ASN	555219.0101	8,00

LED Beirut

Faretti da incasso per interni, corpo in alluminio con ghiera in materiale termoplastico verniciato bianco o argento e diffusore lente in vetro piano convessa.

Recessed spotlight for indoors, aluminium body with ring nut in thermoplastic material painted white or silver and slow diffuser in convex flat glass.

LED Beirut



Color	Diffusor	Color	Diffusor	Code	Euro cad.
S Argento lucido Shiny silver	□ PC opal Opal PC	□ Bianco White	□ PC opal Opal PC	27239	6000K 5,00
				27240	3000K 5,00
Sorgente Source	LED	Sorgente Source	LED		
Potenza Total power	3W	Potenza Total power	3W		
corrente di esercizio operating current	350mA	corrente di esercizio operating current	350mA		
Temperatura di colore Color temperature	3000K	Temperatura di colore Color temperature	6000K 3000K		
Flusso luminoso Lighting output	111Lm	Flusso luminoso Lighting output	135Lm		
Angolo fascio luminoso Beam angle	45°	Angolo fascio luminoso Beam angle	45°		
⊕ CE Ⓢ IK07 IP40 S+L		⊕ CE Ⓢ IK07 IP40 S+L			

