

# LED Kamaleon, IP65



## LED Kamaleon 6 lampade in una.

Plafoniera a LED stagna, idonea per applicazioni civili, commerciali, alberghiere, disponibile in 2 misure  $\varnothing 250\text{mm}$  e  $\varnothing 350\text{mm}$ , con possibilità di scelta tra tre diverse temperature di colore, bianco caldo, bianco neutro o bianco freddo e con scelta della potenza tra 12W, 15W, 18W per la misura più contenuta e 18W, 24W o 30W per la misura più grande.

Corpo e cornice: in nylon rinforzato con fibre di vetro, guarnizione in silicone, viti Torx anti-vandalo imperdibili.

Diffusore: in policarbonato opale, antiurto ed autoestinguente.

Cablaggio: composto da alimentazione 220-240V 50Hz, cavi in PVC HT 105° non propagante la fiamma, doppio isolamento. Installabile sia per impianto sotto parete che esterno; fornita di serie con pressacavo in nylon PG13,5.

## Kamaleon LED 6 lamps in one.

Watertight LED ceiling light, suitable for civil, commercial, hotel applications, available in 2 sizes  $\varnothing 250\text{mm}$  and  $\varnothing 350\text{mm}$ , with the possibility of choosing between three different color temperatures, warm white, neutral white or cold white and with a choice of power between 12W, 15W, 18W for the smallest size and 18W, 24W or 30W for the largest size.




Body and frame: in nylon reinforced with glass fibers, silicone gasket, captive vandal-proof Torx screws.

Diffuser: in opal polycarbonate, shockproof and self-extinguishing.

Wiring: composed of 220-240V 50Hz power supply, non-flame propagating 105 ° PVC cables, double insulation. Can be installed both for under-wall and external systems; supplied as standard with PG13.5 nylon cable gland.



**Cambia la cornice con un semplice click! scegli tra 3 colori diversi grigio, nero e bianco (da ordinare a parte).**  
**Change the frame with a simple click! choose between 3 different colors gray, black and white (on demand).**

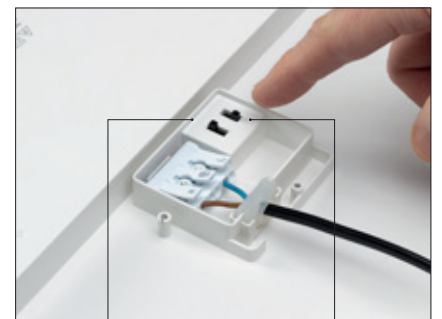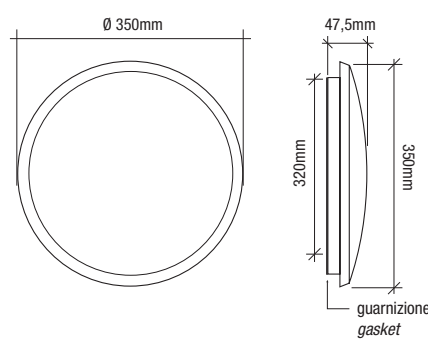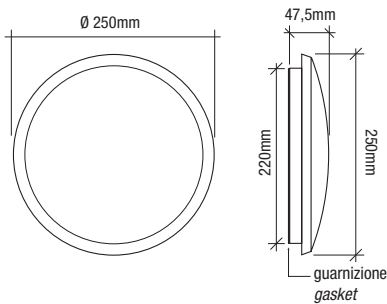

### LED Kamaleon $\varnothing 250\text{mm}$

Color	Code	W	K	Euro cad.
□	2591	12/15/18	3000	45,00
			4000	
			6000	

Sorgente Source SMD

Flusso luminoso max. Lighting output max. 1200/1500/1800 Lm

Peso kg weight kg 0,75



220-240V 50/60Hz DRIVER INCLUDED

### LED Kamaleon $\varnothing 350\text{mm}$

Color	Code	W	K	Euro cad.
□	2592	18/24/30	3000	80,00
			4000	
			6000	


Sorgente Source SMD

Flusso luminoso max. Lighting output max. 1800/2400/3000 Lm

Peso kg weight kg 0,85



220-240V 50/60Hz DRIVER INCLUDED

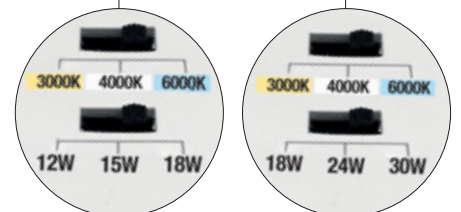



ACCESSORIO Cornice per Kamaleon NON INCLUSA  
Kamaleon Frame ACCESSORY NOT INCLUDED



+



Corpo lampada - Body lamp

Color



Code	Ø mm	Euro cad.
2591	250	45,00
2592	350	80,00

Cornice - Frame

Color



Code	Ø mm	Euro cad.
2591/W	250	5,50
2592/W	350	7,50

Cornice - Frame

Color



Code	Ø mm	Euro cad.
2591/G	250	5,50
2592/G	350	7,50

Cornice - Frame

Color



Code	Ø mm	Euro cad.
2591/B	250	5,50
2592/B	350	7,50