

Otto LED, IP44



Otto LED 3 lampade in una!

Apparecchi da incasso progettati per illuminare aree comuni, corridoi, laboratori, sale riunioni, uffici e qualsiasi ambiente dove è necessaria un'illuminazione diffusa. La struttura del faretto è a base tonda, ideale per sostituire apparecchi con sorgenti fluorescenti compatte.

Installazione: ad incasso in controsoffitti di cartongesso (completo di staffe di fissaggio).

Corpo e telaio LED Otto T3 - T4 - T5: in tecnopolimero ad alta resistenza.

Staffe di fissaggio e viteria: in acciaio.

Verniciatura: di tipo poliestere eseguita a polvere. Colore bianco RAL 9010.

Ottica: diffondente.

Schermo: in lastra tecnopolimero opale.

Temperatura di colore: LED Otto T3 e T4 con possibilità di scelta tra tre diverse temperature di colore, bianco caldo, bianco neutro o bianco freddo, LED Otto T5 3000K o 4000K.

Driver: incluso.

Conforme alla norma: EN60598-1, RG0 nessun rischio fotobiologico ai fini della norma EN62471.

Otto LED 3 lamps in one!

Recessed downlights designed to light up common areas, corridors, laboratories, meeting rooms, offices and any other place that requires diffused lighting. The luminaire structure is round, ideal to replace fixtures with compact fluorescent lamps.

Installation: recessed use in plasterboard false ceilings (complete with fixing brackets)

LED Otto T3 - T4 - T5 body and frame: made by engineering polymer with high resistance.

Fixing brackets and screws: made by steel.

Coating: coated with powdered polyester. RAL 9010 white color.



Optic: diffused.

Shield: opal engineering polymer sheet.

Color temperature: LED Otto T3 and T4 with the possibility of choosing between three different color temperatures, warm white, neutral white or cold white, LED Otto T5 3000K or 4000K.

Driver: included.

According to standard: EN60598-1, RG0 exempt from photo-biological risks in compliance with standard EN62471.

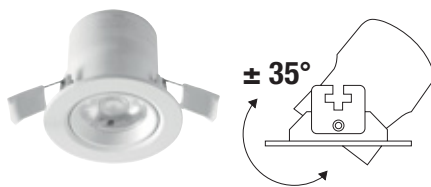

LED Otto T5 Orientabile


LED Otto T5 Adjustable

| Color | Code | W | K | Euro cad. |
|-------|------------|---|------|-----------|
| | 24922/3000 | 9 | 3000 | 12,00 |
| | 24922 | 9 | 4000 | 12,00 |

| Sorgente Source | SMD |
|----------------------------------------------|--------|
| Flusso luminoso max. Lighting output max. | 900 Lm |
| Angolo fascio luminoso Beam angle | 45° |
| Peso kg weight kg | 0,20 |

CELL

220-240V 50/60Hz DRIVER INCLUDED



LED Otto T3


| Color | Code | W | K | Euro cad. |
|-------|--------------|----|------|-----------|
| | 25923/3-4-6K | 25 | 3000 | 20,00 |
| | | | 4000 | |
| | | | 6000 | |

| Sorgente Source | SMD |
|----------------------------------------------|---------|
| Flusso luminoso max. Lighting output max. | 1200 Lm |
| Angolo fascio luminoso Beam angle | 45° |
| Peso kg weight kg | 0,30 |

CELL

220-240V 50/60Hz DRIVER INCLUDED

3 in 1

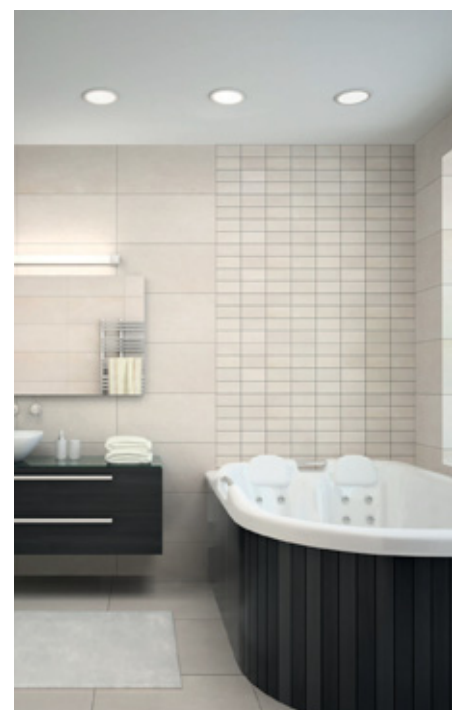



LED Otto T4 con accessorio per plafone
LED Otto T4 with ceiling accessory



LED Otto T4

| Color | Code | W | K | Euro cad. |
|-------|--------------|----|------|-----------|
| □ | 25924/3-4-6K | 25 | 3000 | 28,00 |
| | | | 4000 | |
| | | | 6000 | |

| | |
|----------------------------------------------|----------------|
| Sorgente Source | SMD LED |
| Flusso luminoso max. Lighting output max. | 1200 Lm |
| Angolo fascio luminoso Beam angle | 45° |
| Peso kg weight kg | 0,40 |

CE IK07 IP20 CELL

220-240V 50/60Hz DRIVER INCLUDED

LED Otto T4 ACCESSORIO PER PLAFONE NON INCLUSO LED Otto T4 CEILING ACCESSORY NOT INCLUDED

Color



| Code | H. mm | L. mm | Euro cad. |
|----------|----------|----------|--------------|
| 25924/PL | 33 | 230 | 7,50 |

