


Emergenza 3 moduli per scatola 503 **Emergency 3 module for box 503**

LED CUCULO - cod. 503SE

220-240 Vac	110 Vac a richiesta on demand	50/60 Hz	IP54	IK07	850°	+40 C° -20		CE
----------------	--	-------------	------	------	------	------------------	--	----


Incasso Recessed

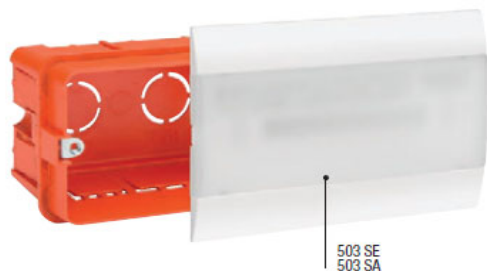


Incasso cartongesso Recessed plasterboard



LED Cuculo 503 + Cod. 503BOX **Sporgente - Wall mounting**

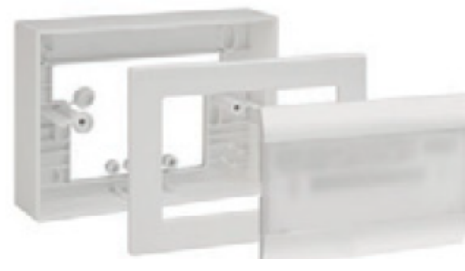

Tensione nominale entrata Nominal input voltage	Vac	220-230Vac
Frequenza di rete Mains Frequency	Hz	50÷60Hz
Potenza Power	W	1,5W (11W*)
Verione Version	SE	
Autonomia Working Time	h	1h
Inibizione Inhibition switch	NO	
Batteria inclusa Battery included	2,4V - 80mAh	
Ricarica Recharge	12h	
Flusso medio Average Flow	120lm SE	
Grado di protezione Protection Rate	IP	IP54

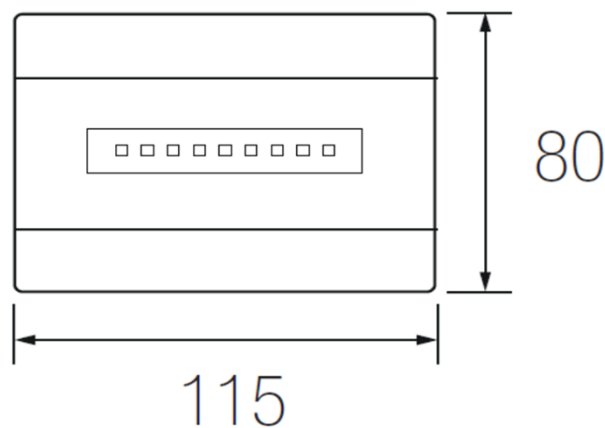

*Potenza confronto tubo fluorescente
 *Power by comparsione with flurescent tube



Batteria di ricambio- Replacement battery

Fig.	Descrizione/Description	Code
4)	Batteria - Battery 2,4V - 800mAh - SE / SA	00PB1800
5)	Batteria - Battery 2,4V - 1600mAh - HSE	00PB1600

4) Cod. 00PB1800



5) Cod. 00PB1600



Conforme alle seguenti norme

2011/65/UE; 2015/863/UE; 2014/35/UE; 2014/30/UE; EN60598-1; EN60598-2-2; EN60598-2-22; EN55015; EN61000-3-2; EN61000-3-3; EN61547; EN62031; EN62471

In compliance with the following standards

RELCO group persegue una politica di continua ricerca e sviluppo, quindi si riserva di variare in qualsiasi momento e senza preavviso le caratteristiche dei prodotti.

RELCO group pursues a policy of continuous research and development and reserves the right to change at any time and without prior notice, the characteristics of the products.