


100 Vac	220-240 Vac	50-60 Hz	IP20	IK10		850°	+40 C° -20		CE
------------	----------------	-------------	------	------	--	------	------------------	--	----

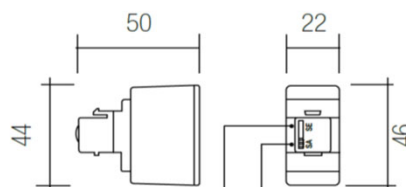

SA = Lampada accesa: SA (sempre accesa) in caso di black-out la luce rimane accesa.

M = Lamp on: M (Maintained) in case of black-out, the light remains on.

SE = LED verde acceso: SE (solo emergenza) funzione lampada in emergenza, si accende solo in caso di black-out.



N/M = LED green on: N/M (Non-Maintained), emergency luminaire function, It turns on only in case of power failure.

Tensione nominale entrata Nominal input voltage	Vac	110 /220-230Vac
Frequenza di rete Mains Frequency	Hz	50÷60Hz
Potenza Power	W	0,5W
Verione Version	SA - SE	
Autonomia Working Time	h	2h
Inibizione Inhibition switch	NO	
Batteria inclusa Battery included	3,6V - 80mAh	
Ricarica Recharge	8h @220-240Vac 12h @110Vac	
Flusso medio Average Flow	30lm SE 5lm SA	
Grado di protezione Protection Rate	IP	IP20

INCLUSI / INCLUDED



A RICHIESTA / ON DEMAND

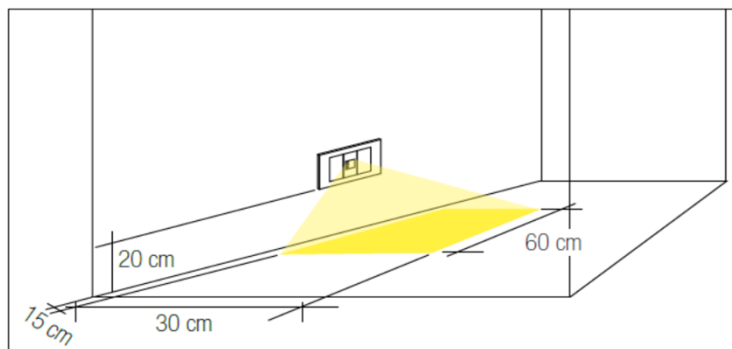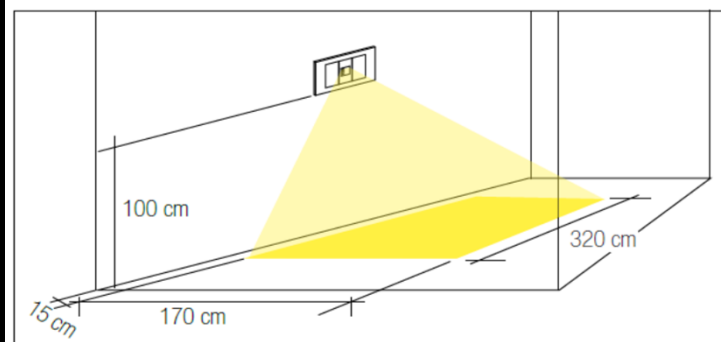

Conforme alle seguenti norme

In compliance with the following standards

2011/65/UE; 2015/863/UE; 2014/35/UE; 2014/30/UE; EN60598-1; EN60598-2-2; EN60598-2-22; EN55015; EN61000-3-2; EN61000-3-3; EN61547; EN62031; EN62471

RELCO group persegue una politica di continua ricerca e sviluppo, quindi si riserva di variare in qualsiasi momento e senza preavviso le caratteristiche dei prodotti.

RELCO group pursues a policy of continuous research and development and reserves the right to change at any time and without prior notice, the characteristics of the products.